

Referencia

432D

Colección / Collection / Collection	Technical Indoor. PRO Professional
Descripción / Description / Description	Empotrable Basculante UGR-Ambiente Recessed Swivel UGR-Ambience Encastré Basculant UGR-d'Ambience

Características Luminaria / Light Data Sheet / Caractéristiques de la Luminaire

Material / Material / Matériau	Aluminio / Aluminium / Aluminium
Colores / Colours / Couleurs	01 Negro / Black / Noir 90 Blanco Técnico / Technical White / Blanc Technique
IP	20
Clase	230Vac GU-10 12Vdc Gx5.3
Driver Ext. / Ext. Driver / Alimentateur Ext	No incluido / Not included / Non-inclus
Portalámparas	No incluido / Not included / Non-inclus
Peso / Weight / Poids	0,10 Kg
Cantidad / Pieces / Quantité	1/ 50

Bombillas LED / LED Lamp / Ampoule LED

Ref. HLX08 (8W)	2700K - 828Lm 3000K - 849Lm 4000K - 891Lm
Ref. HLX12 (12W)	2700K - 1207Lm 3000K - 1238Lm 4000K - 1300Lm
HLP06 (6W - CCT)	3000K - 432Lm 4000K - 467Lm
1LHG-300 (5W - CCT)	3000K - 452Lm 4000K - 478Lm

Compatible lighting with installations that require UGR<19
Compatible con instalaciones que requieren UGR<19
Compatible avec les installations nécessitant UGR <19


Colores / Colours / Couleurs



90 Blanco Técnico / Technical White
/ Blanc Technique

01 Negro / Black / Noir

Accesorios / Accessories / Accessoires

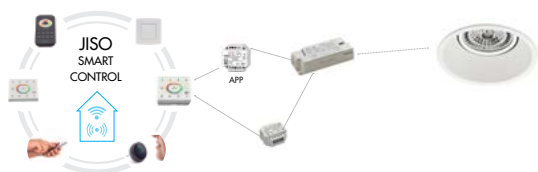

JISO Smart Control



1DH3



1DH1



1DH0



1PHB - GU10-GZ10



1PHG - GU10 100-240V

Documentos / Documents / Des documents

Declaración de Conformidad UE / EU Declaration of Conformity / Déclaration de Conformité UE

http://www.jisoiluminacion.es/CE/Sin-Tecnologia_D.pdf

Instrucciones de Instalación / Installation Instructions / Instructions d'Installation

http://www.jisoiluminacion.es/Instrucciones/432D_I.pdf