

Ref.

53710

Colección / Collection / Collection

Technical Indoor. PRO Professional LED

Descripción / Description / Description

Downlight LED

Downlight LED

Downlight LED

Características Luminaria / Light Data Sheet / Caractéristiques de la Luminaire

| | | | |
|--|---|-----------|---------|
| Material / Material / Matériau | Aluminio / Aluminium / Aluminium | | |
| Material Difusor / Difusor Material / Matériau Diffuseur | PMMA | | |
| Acabado Difusor / Diffuser Finish / Touche Finale du Diffuseur | Ácido / Acid / Acide | | |
| Colores / Colours / Couleurs | 90 Blanco Técnico / Technical White / Blanc Technique | | |
| Vatios / Watts / Watts | 10W | | |
| Lúmens / Lumens / Lumens | Color T. ^a | Useful Lm | Chip Lm |
| | 3000K | 873 lm | 1080 lm |
| | 4000K | 922 lm | 1080 lm |
| Grados Apertura / Opening Angle / Angle d'ouverture | 90° | | |
| IP | Ext 65 Int 20 | | |
| Tiempo de Uso (h/día) / Working Time (h/day) / Temps d'utilisation (h/jour) | 12-14 | | |
| On/Off | 15.000 | | |
| Temperatura de Funcionamiento (Ta) / Working Temperature (Ta) / Température de Fonctionnement (Ta) | -20°C to +40°C | | |
| Humedad de Funcionamiento / Working Humidity / Humidité de Fonctionnement | 20-85% RH | | |
| Peso / Weight / Poids | | | |
| Cantidad / Pieces / Quantité | 1/30 | | |

Características del Chip / Chip Data Sheet / Caractéristiques de la Puce

| | |
|--|------------------|
| Marca / Brand / Marque | SANAN |
| Tipo / Type / Type | SMD 2835 |
| L70 B10 | 50.000 h |
| SDCM (Mac Adam) | 5 |
| EN62471 | RG1 |
| Eficiencia Nominal / Nominal Efficiency / Efficacité Nominal | 120 Lm/W (4000K) |

Características Driver / Driver Data Sheet / Caractéristiques de l'Alimentateur

| Ref. | Driver | Voltaje de Entrada Input Voltage Tension d'Entrée | FP PF FP | Garantía Warranty Garantie | Intensidad de Funcionamiento Working Current Courant de Fonctionnement | Flicker |
|-------------|-------------------------|---|----------------|----------------------------------|--|---------|
| 53710-218_- | ON-OFF. Non Dimmable | AC220-240V 50/60Hz | >0,5 | 5 | 250 mA | Free |
| 53710-238_- | ON-OFF. Non Dimmable | AC220-240V 50/60Hz | >0,9 | 5 | 250 mA | Free |
| 53710-378_- | Dimmable. 1-10V | AC200-240V 50/60Hz | >0,95 | 5 | 250 mA | Free |
| 53710-518_- | Dimmable. Trailing Edge | AC220-240V 50/60Hz | >0,9 | 5 | 250 mA | Free |
| 53710-D78_- | Dimmable. DALI, PUSH | AC200-240V 50/60Hz | >0,95 | 5 | 250 mA | Free |


SMART CONTROL See page. 72 PRO Professional Catalog

Colores / Colours / Couleurs



90 Blanco Técnico / Technical White
/ Blanc Technique

Accesorios / Accessories / Accessoires

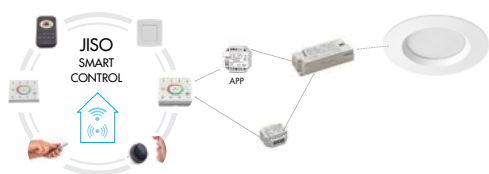

JISO Smart Control



2DCLEDK1



2DCLEDK2

Productos Relacionados / Related Products / Produits Associés



53724

Documentos / Documents / Des documents

Declaración de Conformidad UE / EU Declaration of Conformity / Déclaration de Conformité UE

http://www.jisoiluminacion.es/CE/Empotrables_D.pdf

Instrucciones de Instalación / Installation Instructions / Instructions d'Installation

http://www.jisoiluminacion.es/Instrucciones/535-537_I.pdf

Ficheros Fotométricos LDT / Photometrics File LDT / Fichier Photométrique LDT

http://www.jisoiluminacion.es/Ficheros_LDT/53710_LDT.zip

Ficheros Fotométricos IES / Photometrics File IES / Fichier Photométrique IES

http://www.jisoiluminacion.es/Ficheros_IES/53710_IES.zip