

Ref.

N200114. Krill

Colección / Collection / Collection	Technical Indoor. PRO Professional
Descripción / Description / Description	Tira de Neón flexible LED Flex Neon Light Bande Neon

**Características Luminaria / Light Data Sheet /
Caractéristiques de la Luminaire**

W/m	14,4	
Rollo / Roll /	5 m	
Vatios / Watts / Watts	72	
Input Voltage	DC 24V	
Lúmens / Lumens / Lumens	Color T. ^a	Useful Lm
	2700K*	950 lm
	3000K	950 lm
	4000K	1000 lm
	RGB	-
Grados Apertura / Opening Angle / Angle d'ouverture	160°	
IP	67	
Tiempo de Uso (h/día) / Working Time (h/day) / Temps d'utilisation (h/jour)	12/14h	
Temperatura de Funcionamiento (Ta) / Working Temperature (Ta) / Température de Fonctionnement (Ta)	-20°C to +45°C	
Humedad de Funcionamiento / Working Humidity / Humidité de Fonctionnement	20-85% RH	
Peso / Weight / Poids	0,80Kg	
Cantidad / Pieces / Quantité	1/ 10	


Características del Chip / Chip Data Sheet / Caractéristiques de la Puce

Marca / Brand / Marque	SANAN
Tipo / Type / Type	SMD


* On Reques / Bajo Pedido / Sur Demande

Ref.	Chip	LED/m	Corte Cut x	Garantía Warranty Garantie	Power Supply	Input Voltage
N200114-248_-	2236	240	10 c,m	3	No	DC24V
N200114-24R-	3535	120	5 c,m	3	No	DC24V

Accesorios / Accessories / Accessoires




HCN01-T01
End cap




HCN01-F01
Clips



HCN01-C01
Splice connector
Single Colour




HCN01-C02
Connector.
Single Colour
Cable's length 150mm

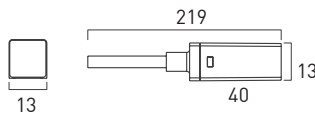

HCN01-C03
Single color
HCN01-C03R
RGB
Jumper Connector
Cable's length 150mm



HCN01-C02R
Connector RGB

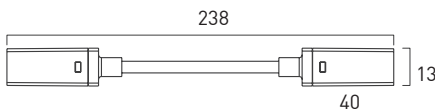


JISO Smart Control

Uniform&Seven light source with no LED "hotspots"
Top view (three-dimensional Emitting) more durable and flexible with 120mm minimum bending diameter
Easy instalation. Vertical Bending

Uniforme y sin problemas de visualización de puntos de luz.
Iluminación en parte superior (a tres caras). Más durabilidad y flexibilidad con diámetro mínimo de doblado 120mm.
Fácil instalación. Doblado vertical.

Uniforme et sans problèmes de visions des points de lumière.
Illumination vers le haut (en trois faces). Plus durable et flexible avec Diamètre minimal du plie 120mm.
Installation facile. Plie vertical.

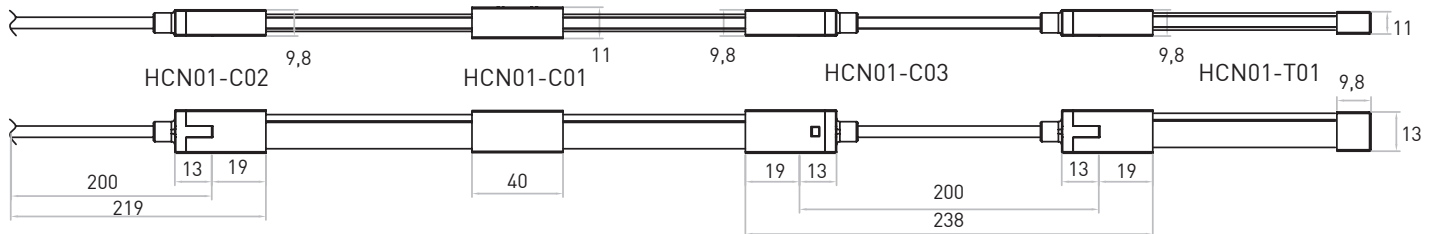

Documentos / Documents / Des documents

Declaración de Conformidad UE / EU Declaration of Conformity / Déclaration de Conformité UE

<http://www.jisoiluminacion.es/CE/CE-LED-STRIPS.pdf>

Instrucciones de Instalación / Installation Instructions / Instructions d'Installation

http://www.jisoiluminacion.es/Instrucciones/Instrucciones-N200114_Krill.pdf
<http://www.jisoiluminacion.es/Instrucciones/Instrucciones-N200114-Krill-RGB.pdf>

Ficheros Fotométricos LDT / Photometrics File LDT / Fichier Photométrique LDT

http://www.jisoiluminacion.es/Ficheros_LDT/N200114.ltd.zip
http://www.jisoiluminacion.es/Ficheros_LDT/N200114RGB.ltd.zip

Ficheros Fotométricos IES / Photometrics File IES / Fichier Photométrique IES

http://www.jisoiluminacion.es/Ficheros_IES/N200114.IES.zip
http://www.jisoiluminacion.es/Ficheros_IES/N200114RGB.IES.zip

Etiqueta Energética / Energy Label / Label Énergétique

http://www.jisoiluminacion.es/EE/EE_N200114.pdf