

PRO
PROFESSIONAL
LED

"The best is yet to Light"



Surface

JISO
ILUMINACION
SPAIN



Surface


Light Integrated LED P.326



29010 P.327



26308 P.328



26314 P.329



26324 P.330



26330 P.331



26408 P.332



26414 P.333



26424 P.334



26430 P.335



25015 P.336




27020 P.337

Available ● Black/Negro/Noir






29010

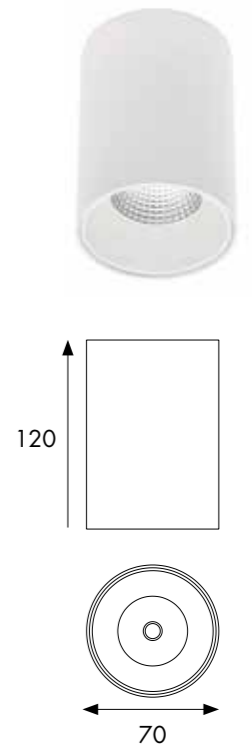Downlight LED Superficie
Downlight LED Surface
Luminaire en Saillie



290 10 - 28 8 3 - 90

1 - Model	2 - W	3 - Driver	4 - Brand Chip	5 - K	6 - Color
290	10	⏻ 28 - ON-OFF AC220-240V PF >0,5	8 - Edison	3 - ■ 3000 915 Lm System 1353 Lm Source 4 - ■ 4000 941 Lm System 1380 Lm Source	 01 Black / Negro / Noir  08* Grey / Gris / Gris  90 T. White / Blanco T. / Blanc T.

LED CHIP: COB - CRI>80 - L70 / 50.000H - 113 lm/W (4000K) - RG1




The above information is basic. For updated and more accurate information, please consult Technical Data Sheet on www.jisoiluminacion.com
Consult general issues - www.jisoiluminacion.com (Download - Technical Information)

* Available reference up to the end of stock.



26308


Downlight LED Superficie
Downlight LED Surface
Luminaire en Saillie

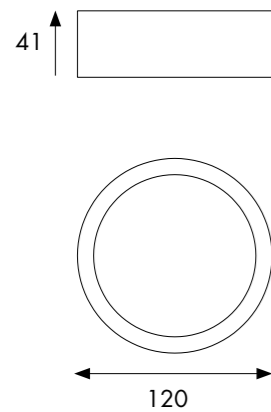

Improved
Greater tightness IP43
Best aesthetics without screws or slots
Easy installation
Safety cable
Regulation and control admitted

26314

Downlight LED Superficie
Downlight LED Surface
Luminaire en Saillie

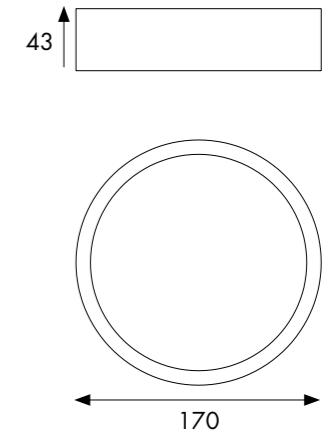

Without screws & hole, fixed to ceiling by rotation system

263 08 - 21 8 4 - 90

1 - Model	2 - W	3 - Driver	4 - Brand Chip	5 - K	6 - Color
263	8	<ul style="list-style-type: none"> 21 - ON-OFF AC220-240V PF >0,9 51 - Trailing Edge AC220-240V PF >0,9 SMART CONTROL See Page. 414 	8 - Edison	<ul style="list-style-type: none"> 0 - CCT Switch 2700 547 Lm System 840 Lm Source 3 - 3000 561 Lm System 960 Lm Source 4 - 4000 633 Lm System 960 Lm Source 	<ul style="list-style-type: none"> 01 Black / Negro / Noir (CCT Switch) 90 T. White / Blanco T. / Blanc T. (3000K&4000K)

LED CHIP: SMD 2835 - CRI>80 - L70B10/ 50.000H - 120 lm/W (4000K) - RG0



The above information is basic. For updated and more accurate information, please consult Technical Data Sheet on www.jisoiluminacion.com
Consult general issues - www.jisoiluminacion.com (Download - Technical Information)
Consult instructions to Driver configuration - page 470
Consult instructions to Driver dimmable Trailing Edge, 1-10V, DALI and Push - www.jisoiluminacion.com (Download - Technical Information)
Consult instructions to Driver dimmable Smart Control - page 414

263 14 - 21 8 4 - 01

1 - Model	2 - W	3 - Driver	4 - Brand Chip	5 - K	6 - Color
263	14	<ul style="list-style-type: none"> 21 - ON-OFF AC220-240V PF >0,9 23 - ON-OFF AC220-240V PF >0,95 47 - DALI/PUSH/1-10V AC200-240V PF >0,95 51 - Trailing Edge AC220-240V PF >0,9 SMART CONTROL See Page. 414 	8 - Edison	<ul style="list-style-type: none"> 0 - CCT Switch 2700 993 Lm System 1680 Lm Source 3 - 3000 1018 Lm System 1680 Lm Source 4 - 4000 1159 Lm System 1680 Lm Source 	<ul style="list-style-type: none"> 01 Black / Negro / Noir (CCT Switch) 90 T. White / Blanco T. / Blanc T. (3000K&4000K)

LED CHIP: SMD 2835 - CRI>80 - L70B10/ 50.000H - 120 lm/W (4000K) - RG0




The above information is basic. For updated and more accurate information, please consult Technical Data Sheet on www.jisoiluminacion.com
Consult general issues - www.jisoiluminacion.com (Download - Technical Information)
Consult instructions to Driver configuration - page 470
Consult instructions to Driver dimmable Trailing Edge, 1-10V, DALI and Push - www.jisoiluminacion.com (Download - Technical Information)
Consult instructions to Driver dimmable Smart Control - page 41



26324

Downlight LED Superficie
Downlight LED Surface
Luminaire en Saillie

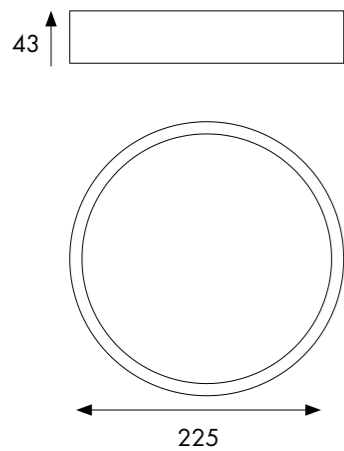


Without screws & hole, fixed to ceiling by rotation system

26330

Downlight LED Superficie
Downlight LED Surface
Luminaire en Saillie



Without screws & hole, fixed to ceiling by rotation system

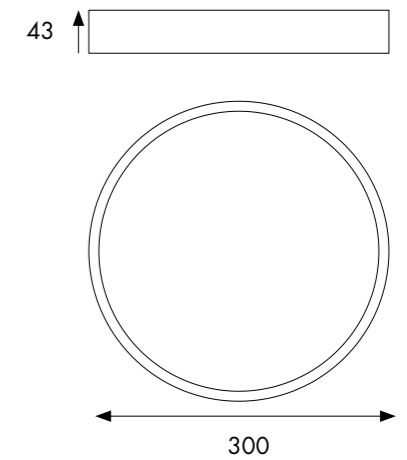

263 24 - 21 8 4 - 01

1 - Model	2 - W	3 - Driver	4 - Brand Chip	5 - K	6 - Color
263	24	<ul style="list-style-type: none"> 21 - ON-OFF AC220-240V PF >0,9 23 - ON-OFF AC220-240V PF >0,95 47 - DALI/PUSH/1-10V AC200-240V PF >0,95 51 - Trailing Edge AC220-240V PF >0,9 SMART CONTROL See Page. 414 	8 - Edison	<ul style="list-style-type: none"> 0 - CCT Switch 2700 1593 Lm System 2880 Lm Source 3 - 3000 1634 Lm System 2880 Lm Source 4 - 4000 1820 Lm System 2880 Lm Source 	<ul style="list-style-type: none"> 01 Black / Negro / Noir (CCT Switch) 90 T. White / Blanco T. / Blanc T. (3000K&4000K)

▼ Accessories not included

Emergency Kit		
2DCLEDK1	TCI	1 h

LED CHIP: SMD 2835 - CRI>80 - L70B10/ 50.000H - 120 lm/W (4000K) - RGO



The above information is basic. For updated and more accurate information, please consult Technical Data Sheet on www.jisoiluminacion.com
 Consult general issues - www.jisoiluminacion.com (Download - Technical Information)
 Consult Instructions Emergency kit on www.jisoiluminacion.com
 Consult instructions to Driver configuration - page 470
 Consult instructions to Driver dimmable Trailing Edge, 1-10V, DALI and Push - www.jisoiluminacion.com (Download - Technical Information)
 Consult instructions to Driver dimmable Smart Control - page 414

263 30 - 21 8 3 - 90

1 - Model	2 - W	3 - Driver	4 - Brand Chip	5 - K	6 - Color
263	30	<ul style="list-style-type: none"> 21 - ON-OFF AC220-240V PF >0,9 23 - ON-OFF AC220-240V PF >0,95 47 - DALI/PUSH/1-10V AC200-240V PF >0,95 51 - Trailing Edge AC220-240V PF >0,9 SMART CONTROL See Page. 414 	8 - Edison	<ul style="list-style-type: none"> 0 - CCT Switch 2700 2062 Lm System 3600 Lm Source 3 - 3000 2115 Lm System 3600 Lm Source 4 - 4000 2397 Lm System 3600 Lm Source 	<ul style="list-style-type: none"> 01 Black / Negro / Noir (CCT Switch) 90 T. White / Blanco T. / Blanc T. (3000K&4000K)

▼ Accessories not included

Emergency Kit		
2DCLEDK1	TCI	1 h

LED CHIP: SMD 2835 - CRI>80 - L70B10/ 50.000H - 120 lm/W (4000K) - RGO




The above information is basic. For updated and more accurate information, please consult Technical Data Sheet on www.jisoiluminacion.com
 Consult general issues - www.jisoiluminacion.com (Download - Technical Information)
 Consult Instructions Emergency kit on www.jisoiluminacion.com
 Consult instructions to Driver configuration - page 470
 Consult instructions to Driver dimmable Trailing Edge, 1-10V, DALI and Push - www.jisoiluminacion.com (Download - Technical Information)
 Consult instructions to Driver dimmable Smart Control - page 414



26408


Downlight LED Superficie
Downlight LED Surface
Luminaire en Saillie

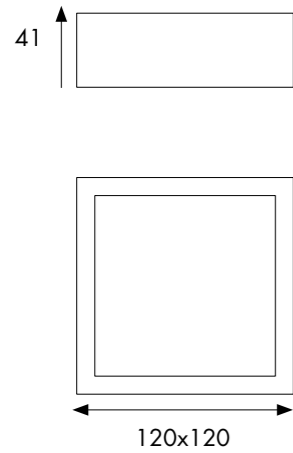

Improved
Greater tightness IP43
Best aesthetics without screws or slots
Easy installation
Safety cable
Regulation and control admitted

26414

Downlight LED Superficie
Downlight LED Surface
Luminaire en Saillie

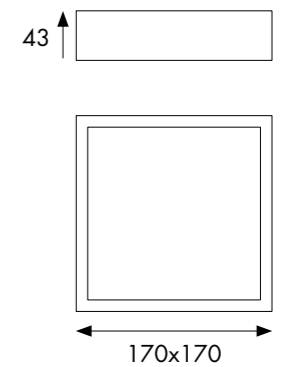

Without screws & hole, fixed to ceiling by rotation system

264 08 - 21 8 0 - 90

1 - Model	2 - W	3 - Driver	4 - Brand Chip	5 - K	6 - Color
264	8	<ul style="list-style-type: none"> 21 - ON-OFF AC220-240V PF >0,9 51 - Trailing Edge AC220-240V PF >0,9 SMART CONTROL See Page. 414 	8 - Edison	<ul style="list-style-type: none"> 0 - CCT Switch 2700 487 Lm System 960 Lm Source 3000 499 Lm System 960 Lm Source 4000 519 Lm System 960 Lm Source 	90 T. White / Blanco T. / Blanc T.

LED CHIP: SMD 2835 - CRI>80 - L70B10/ 50.000H - 120 lm/W (4000K) - RG0



The above information is basic. For updated and more accurate information, please consult Technical Data Sheet on www.jisoiluminacion.com
Consult general issues - www.jisoiluminacion.com (Download - Technical Information)
Consult instructions to Driver configuration - page 470
Consult instructions to Driver dimmable Trailing Edge, 1-10V, DALI and Push - www.jisoiluminacion.com (Download - Technical Information)
Consult instructions to Driver dimmable Smart Control - page 414


264 14 - 21 8 0 - 90

1 - Model	2 - W	3 - Driver	4 - Brand Chip	5 - K	6 - Color
264	14	<ul style="list-style-type: none"> 21 - ON-OFF AC220-240V PF >0,9 23 - ON-OFF AC220-240V PF >0,95 47 - DALI/PUSH/1-10V AC200-240V PF >0,95 51 - Trailing Edge AC220-240V PF >0,9 SMART CONTROL See Page. 414 	8 - Edison	<ul style="list-style-type: none"> 0 - CCT Switch 2700 936 Lm System 1680 Lm Source 3000 960 Lm System 1680 Lm Source 4000 1200 Lm System 1680 Lm Source 	90 T. White / Blanco T. / Blanc T.

LED CHIP: SMD 2835 - CRI>80 - L70B10/ 50.000H - 120 lm/W (4000K) - RG0



The above information is basic. For updated and more accurate information, please consult Technical Data Sheet on www.jisoiluminacion.com
Consult general issues - www.jisoiluminacion.com (Download - Technical Information)
Consult instructions to Driver configuration - page 470
Consult instructions to Driver dimmable Trailing Edge, 1-10V, DALI and Push - www.jisoiluminacion.com (Download - Technical Information)
Consult instructions to Driver dimmable Smart Control - page 414

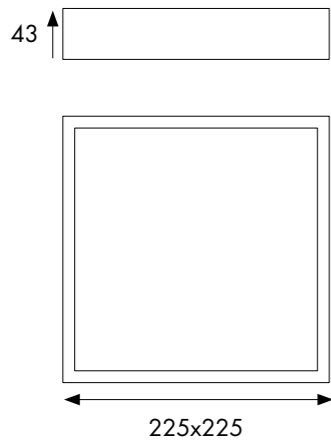


26424
Downlight LED Superficie
Downlight LED Surface
Luminaire en Saillie

26430
Downlight LED Superficie
Downlight LED Surface
Luminaire en Saillie



Without screws & hole, fixed to ceiling by rotation system

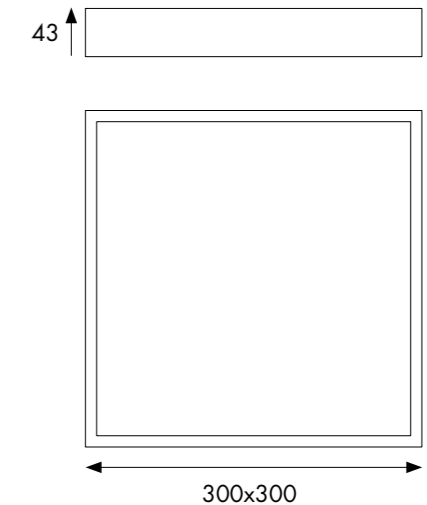

264 24 - 21 8 0 - 90
1 2 3 4 5 6

1 - Model	2 - W	3 - Driver	4 - Brand Chip	5 - K	6 - Color
264	24	<ul style="list-style-type: none"> 21 - ON-OFF AC220-240V PF >0,9 23 - ON-OFF AC220-240V PF >0,95 47 - DALI/PUSH/1-10V AC200-240V PF >0,95 51 - Trailing Edge AC220-240V PF >0,9 SMART CONTROL See Page. 414 	8 - Edison	<ul style="list-style-type: none"> 0 - CCT Switch 2700 1669 Lm System 2880 Lm Source 3000 1712 Lm System 2880 Lm Source 4000 1937 Lm System 2880 Lm Source 	<ul style="list-style-type: none"> 01 Black / Negro / Noir 90 T. White / Blanco T. / Blanc T.

▼ Accessories not included
Emergency Kit
2DCLEDK1 TCI 1 h

LED CHIP: SMD 2835 - CRI>80 - L70B10/ 50.000H - 120 lm/W (4000K) - RGO



The above information is basic. For updated and more accurate information, please consult Technical Data Sheet on www.jisoiluminacion.com
Consult general issues - www.jisoiluminacion.com (Download - Technical Information)
Consult Instructions Emergency kit on www.jisoiluminacion.com
Consult instructions to Driver configuration - page 470
Consult instructions to Driver dimmable Trailing Edge, 1-10V, DALI and Push - www.jisoiluminacion.com (Download - Technical Information)
Consult instructions to Driver dimmable Smart Control - page 414

264 30 - 21 8 0 - 01
1 2 3 4 5 6

1 - Model	2 - W	3 - Driver	4 - Brand Chip	5 - K	6 - Color
264	30	<ul style="list-style-type: none"> 21 - ON-OFF AC220-240V PF >0,9 23 - ON-OFF AC220-240V PF >0,95 47 - DALI/PUSH/1-10V AC200-240V PF >0,95 51 - Trailing Edge AC220-240V PF >0,9 SMART CONTROL See Page. 414 	8 - Edison	<ul style="list-style-type: none"> 0 - CCT Switch 2700 2074 Lm System 3600 Lm Source 3000 2127 Lm System 3600 Lm Source 4000 2267 Lm System 3600 Lm Source 	<ul style="list-style-type: none"> 01 Black / Negro / Noir 90 T. White / Blanco T. / Blanc T.

▼ Accessories not included
Emergency Kit
2DCLEDK1 TCI 1 h

LED CHIP: SMD 2835 - CRI>80 - L70B10/ 50.000H - 120 lm/W (4000K) - RGO



The above information is basic. For updated and more accurate information, please consult Technical Data Sheet on www.jisoiluminacion.com
Consult general issues - www.jisoiluminacion.com (Download - Technical Information)
Consult Instructions Emergency kit on www.jisoiluminacion.com
Consult instructions to Driver configuration - page 470
Consult instructions to Driver dimmable Trailing Edge, 1-10V, DALI and Push - www.jisoiluminacion.com (Download - Technical Information)
Consult instructions to Driver dimmable Smart Control - page 414




25015


Aplique LED con Sensor Infrarrojo
Infrared LED Sensor Lamp Wall
Applique LED avec Capteur Infrarouge

Detection Range: 160° / 360°
Detection Distance:
Wall: max. 9,00m. (<24°C)
Ceiling: max. 6,00m. (<24°C)
Time Delay: (ADJUSTABLE)
MIN.: 10 sec. +3 sec.
MAX.: 5 min. +1 min.
Ambient Light (Day / Night) (ADJUSTABLE): <3 lux-2000 lux
Detection Motion Speed: 0.6 -1.5 m/s
Installing Height:
Wall: 1.8m-2.5m
Ceiling: 2.2m- 4.00 m

Information Sensor




Height of installation: 1.8-2.5m



Detection Distance: Max. 9m. Pared-Techo 6m

Time Delay / Ambient Light (Day And Night): (Adjustable)

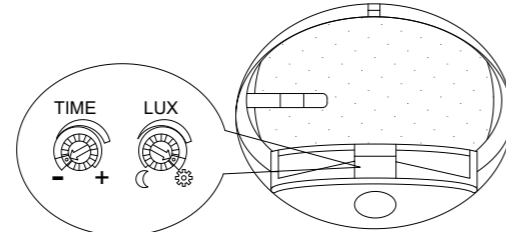


27020

Plafon LED con Sensor Infrarrojo
Infrared LED Sensor Lamp
Plafon LED avec Capteur Infrarouge


Detection Range: 360°.
Detection Distance: max. 6,00m. (<24°C)
Time Delay: (ADJUSTABLE)
MIN.: 10 sec. + 3 sec.
MAX.: 3 min. + 30 sec.
Ambient Light (Day / Night) (ADJUSTABLE): <3 lux – 2000 lux
Detection Motion Speed: 0.6 - 1.5 m/s
Installing Height: 2.2m. - 4.00 m



Information Sensor




Height of installation: 2.2-4m



Detection Distance: Max. 6m

Time Delay / Ambient Light (Day And Night): (Adjustable)

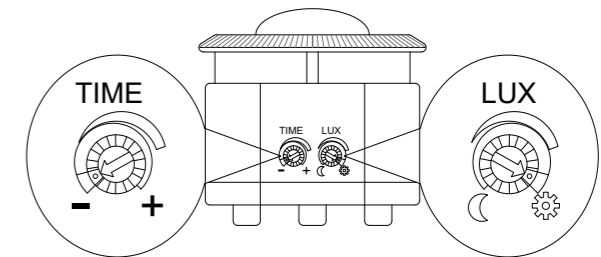

250 15 - 99 6 4 - 90
1 2 3 4 5 6

1 - Model	2 - W	3 - Driver	4 - Brand Chip	5 - K	6 - Color
250	15	99 - ON-OFF AC220-240V PF >0,5	6 - Sanan	4 - 4000 1050 Lm System 1800 Lm Source	90 T. White / Blanco T. / Blanc T.

LED CHIP: SMD 2835 - CRI>80 - L70B10/30.000H - 120 lm/W (4000K) - RG0



The above information is basic. For updated and more accurate information, please consult Technical Data Sheet on www.jisoiluminacion.com
Consult general issues - www.jisoiluminacion.com (Download - Technical Information)

270 20 - 99 6 4 - 90
1 2 3 4 5 6

1 - Model	2 - W	3 - Driver	4 - Brand Chip	5 - K	6 - Color
270	20	99 - ON-OFF AC220-240V PF >0,9	6 - Sanan	4 - 4000 1440 Lm System 2400 Lm Source	90 T. White / Blanco T. / Blanc T.

LED CHIP: SMD 2835 - CRI>80 - L70B10/30.000H - 120 lm/W (4000K) - RG0



The above information is basic. For updated and more accurate information, please consult Technical Data Sheet on www.jisoiluminacion.com
Consult general issues - www.jisoiluminacion.com (Download - Technical Information)

