



THE ESSENCE OF
LIGHT, NATURE & LIFE



Cave

7 Model
6 Power
P. 72

Lake


12 Model
3 Power
P. 96

AM

BI

EN

CE

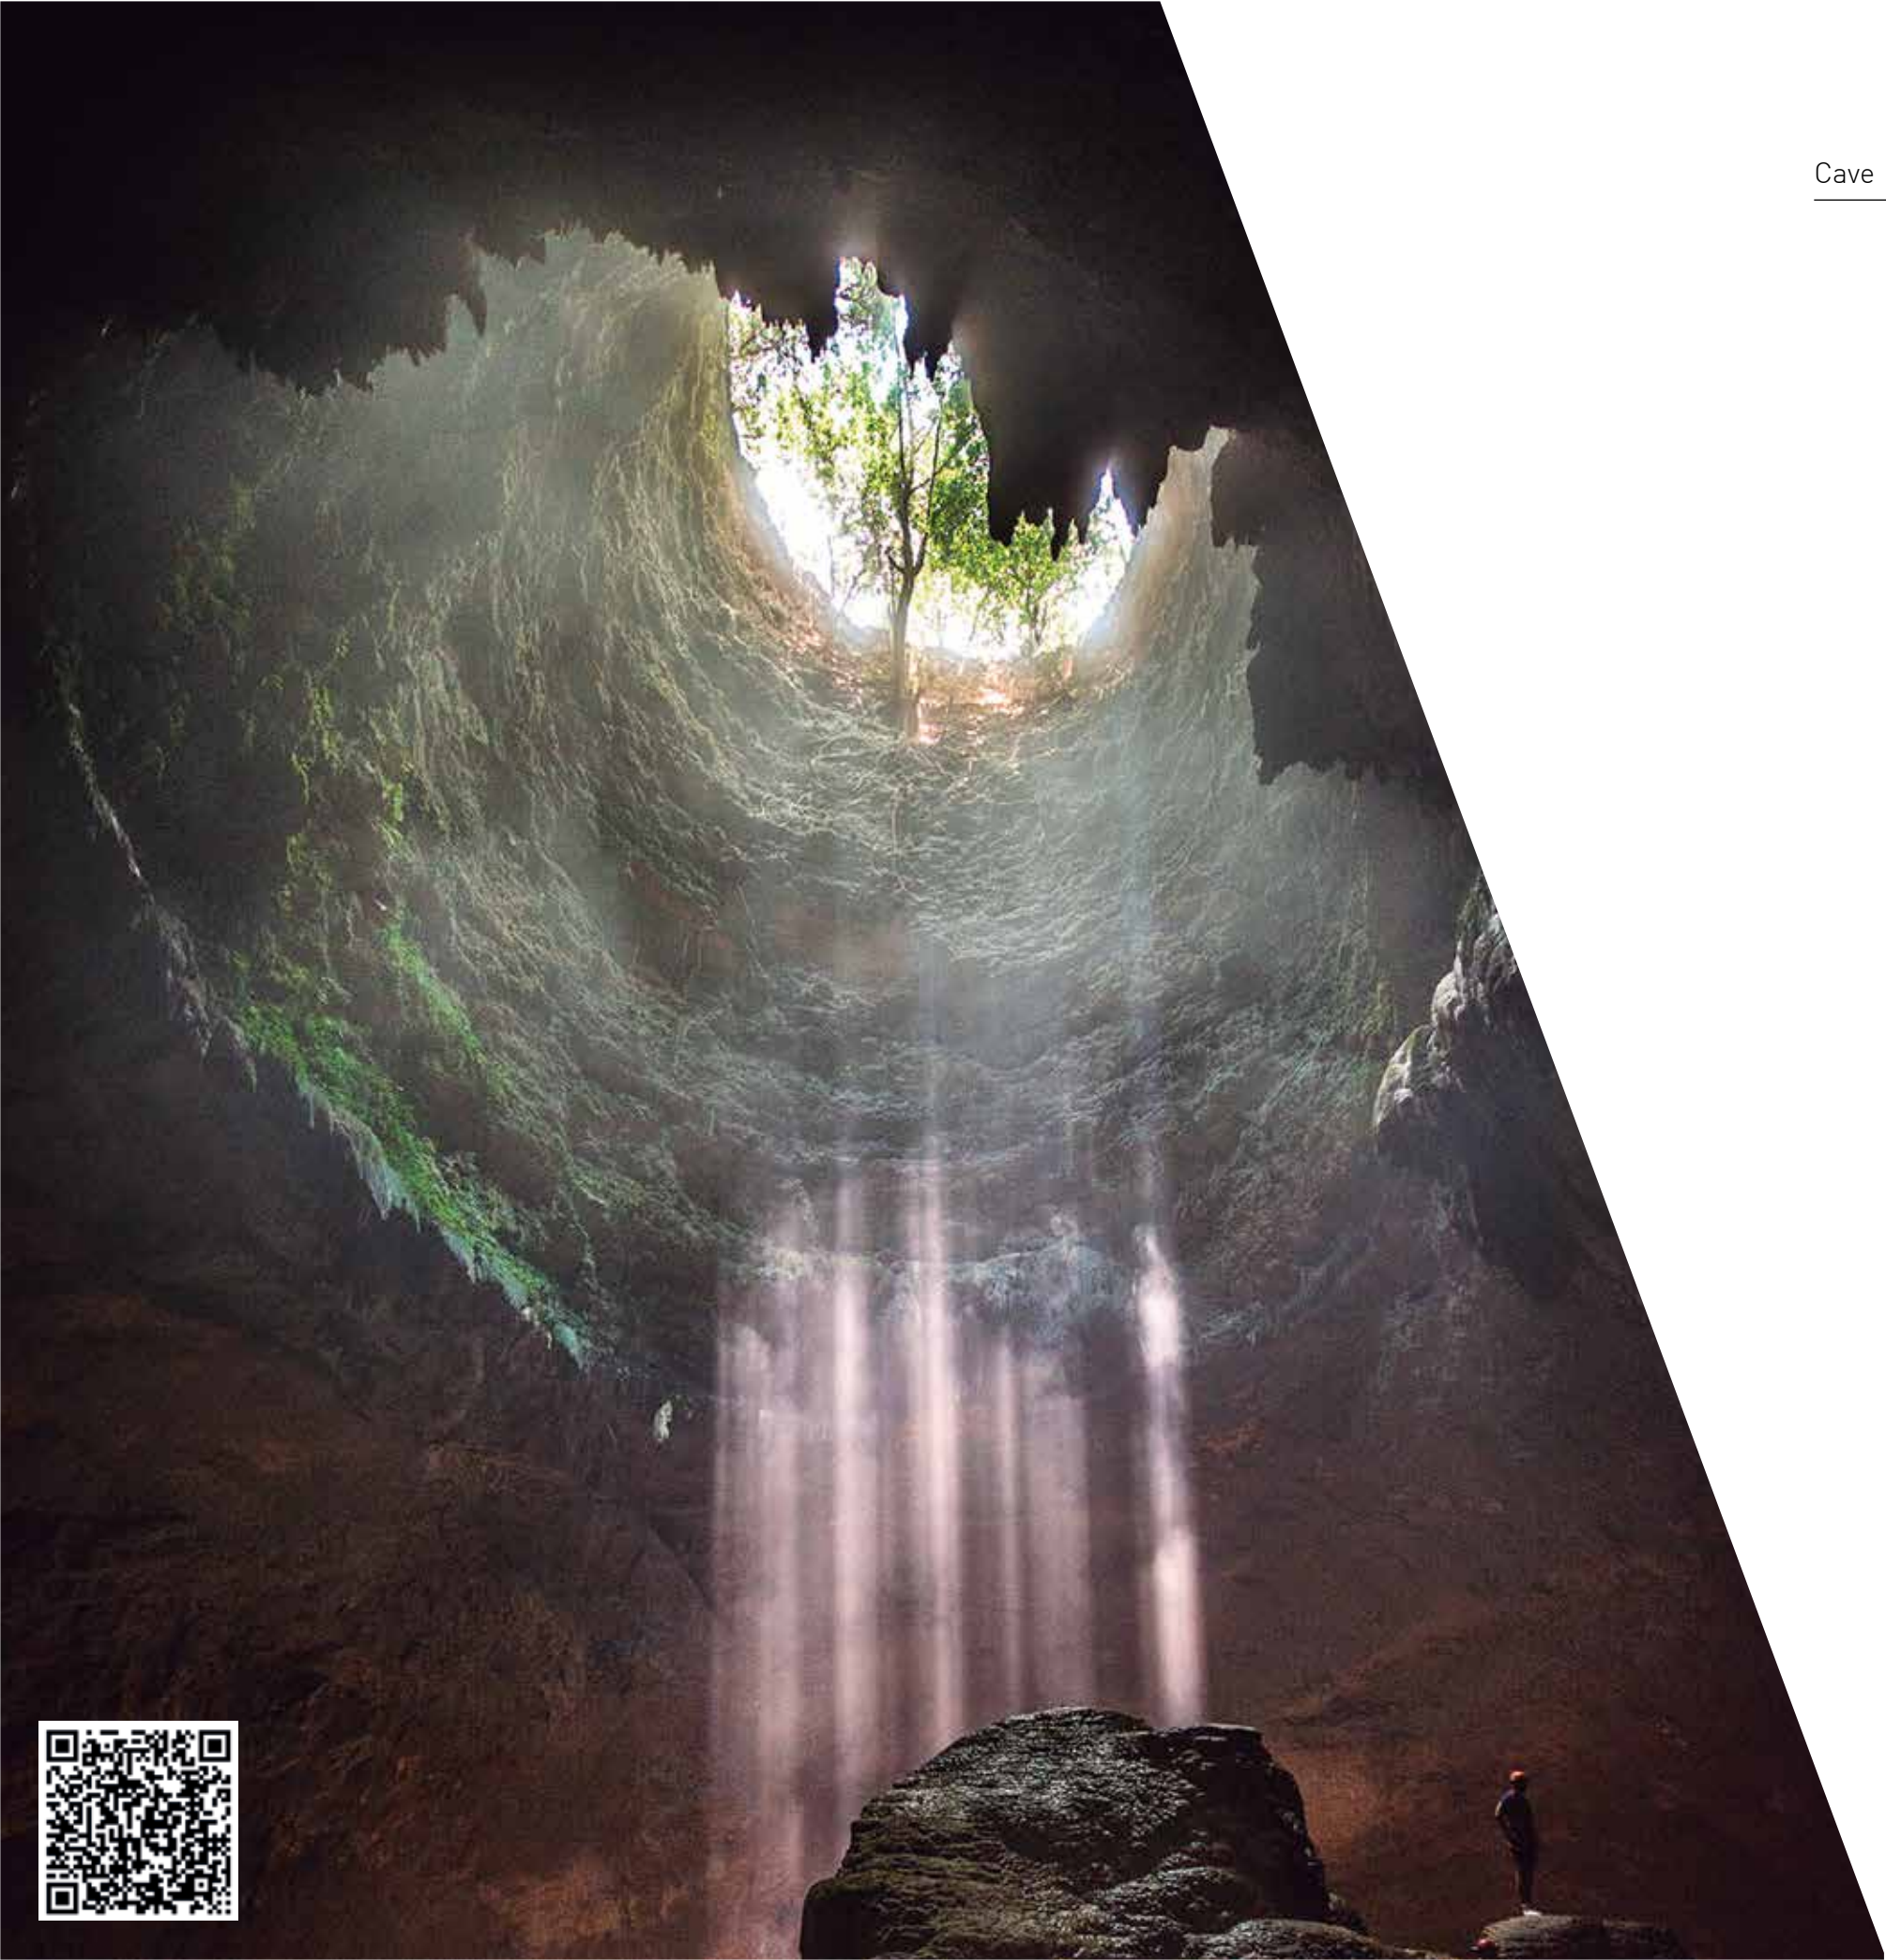

Cave



CAVE 03
3W - P083



CAVE 05
5W - P085



CAVE 10
10W - P087



CAVE 15
15W - P089



CAVE 22
22/30W - P091



CAVE 30
30W - P093



CAVE RW10
10W - P095
[WallWasher]

Con la intensidad y majestuosidad en que la luz llega a una cueva, Cave penetra de forma sorprendente en cualquier estancia. Su gran tamaño y diseño evoca la grandilocuencia de la naturaleza de esta luminaria.

With the intensity and majesty in which light reaches a cave, Cave surprisingly penetrates into any stay. Its large size and design evokes the bombast in nature of this light.



CAVE




We present a new family of LED downlights, "CAVE", Made with an Aluminum body, it is composed of 7 models of different sizes with up to 6 different powers, from 3W to 30W. Its minimalist design allows us to have an extra thin ring on the surface and its "Deep Effect" generates a visible depth from any point, achieving an Anti Glering UGR <19. To complete all kind of projects, we have a wide variety of finishes, as well as multiple color temperature options, and Smart regulation systems and controls. We highlight: its IP44 ext., its easy installation and the option of aluminum rings to cover an uppercut if necessary, as well as the possibility of replacing the COB LED module, just by removing 3 screws.

The luminaire always includes a driver, in on / off format, JISO SPAIN driver with a 5-year warranty.

The luminaire is CB Certified and several of the models have EER certificates available for distribution in Saudi Arabia.

- “Deep Effect”
- Minimalist aesthetic
- Semitrimless
- Facility to replace led module



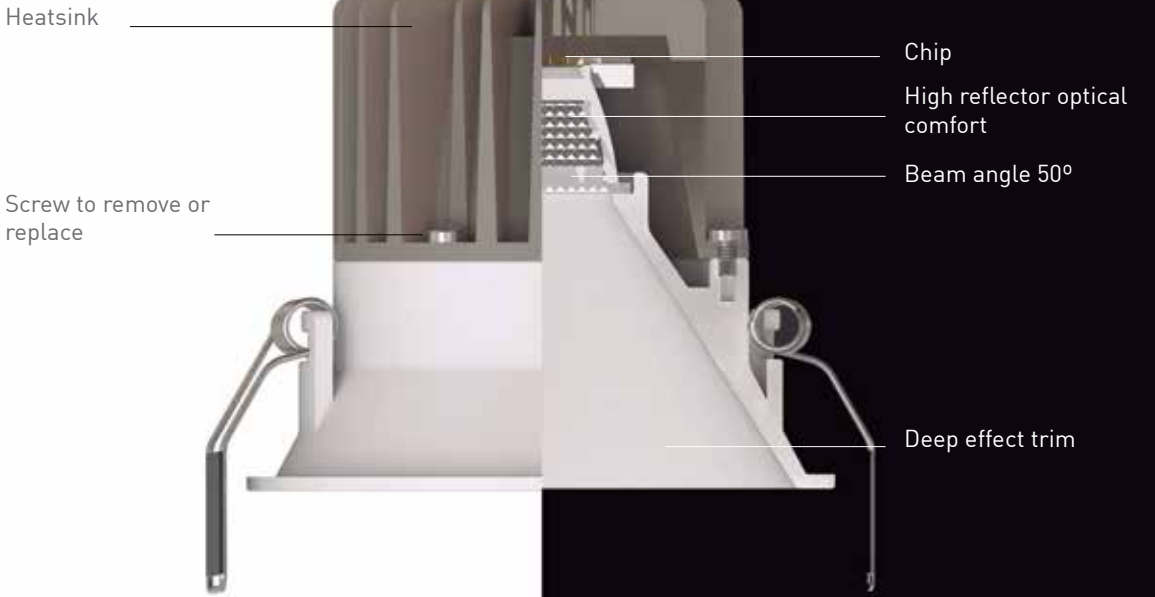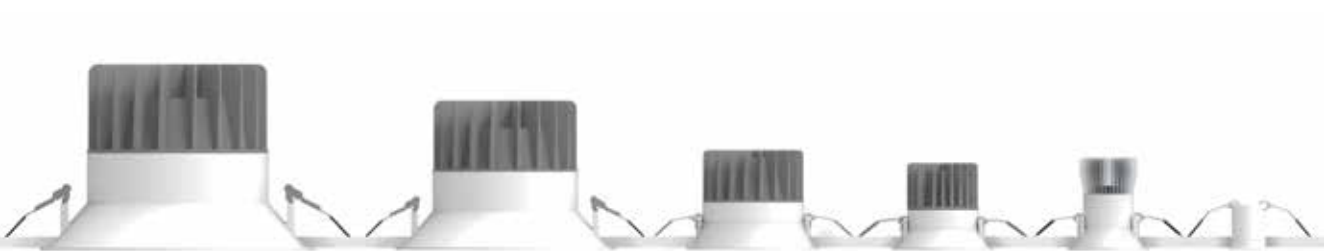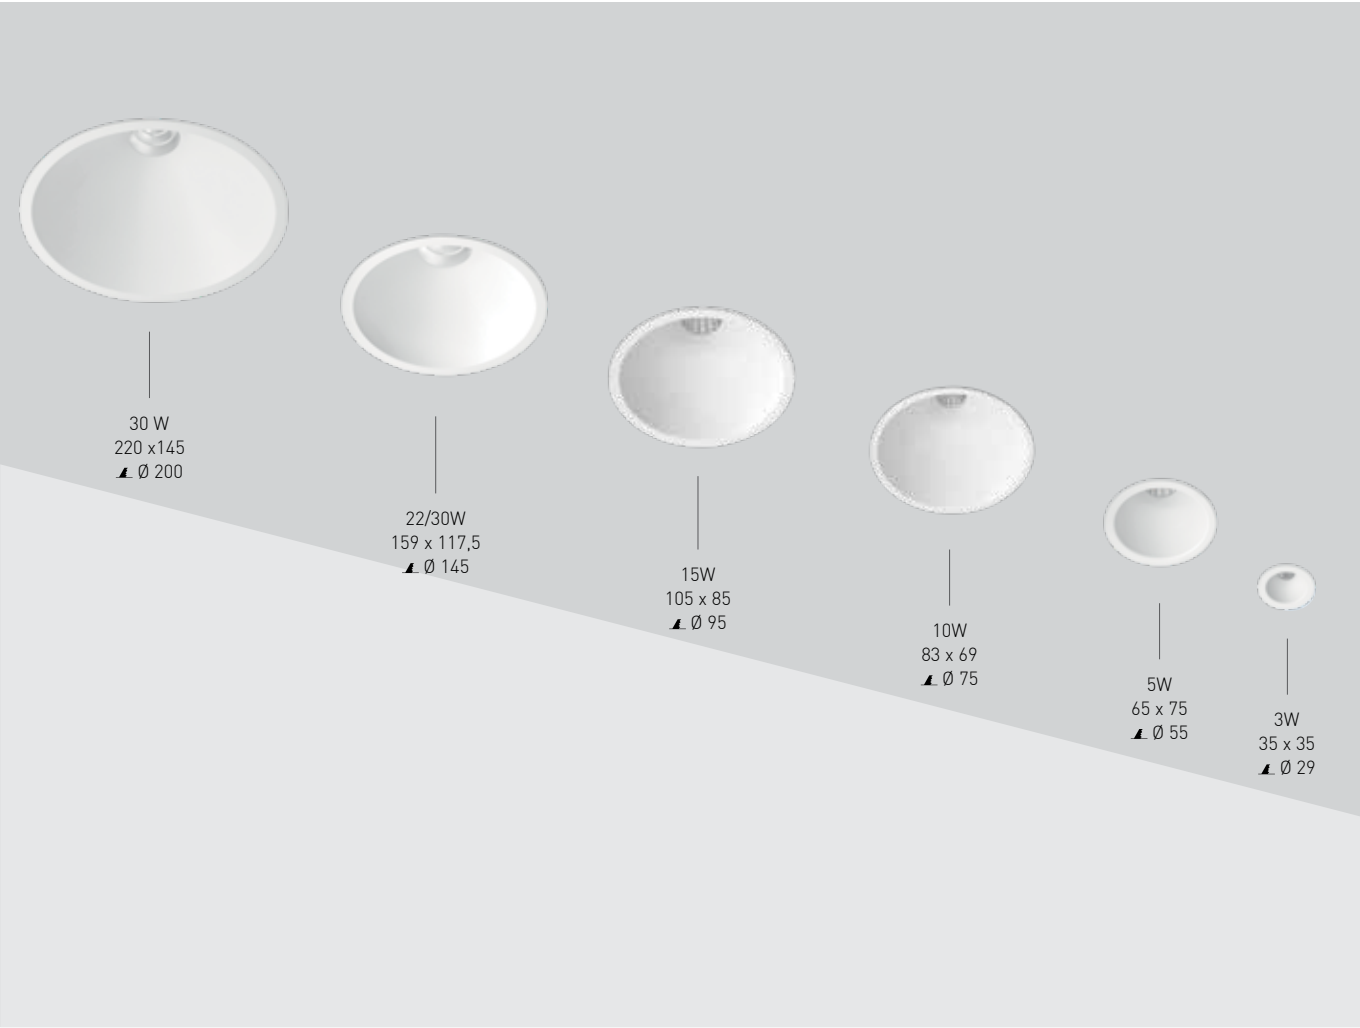

CAVE offers the option of adding aluminium rings to cover different cut-outs from the luminaire if necessary. These accessories are available in the same finishes as the luminaire, and their simple and quick installation considerably expands the installation possibilities.

- Size:
- DC51040

Ø 200-230
- DC51022


Ø 120-130
- DC51015

Ø 95-110
- DC51010

Ø 75-90



Optical opening
degrees 50°

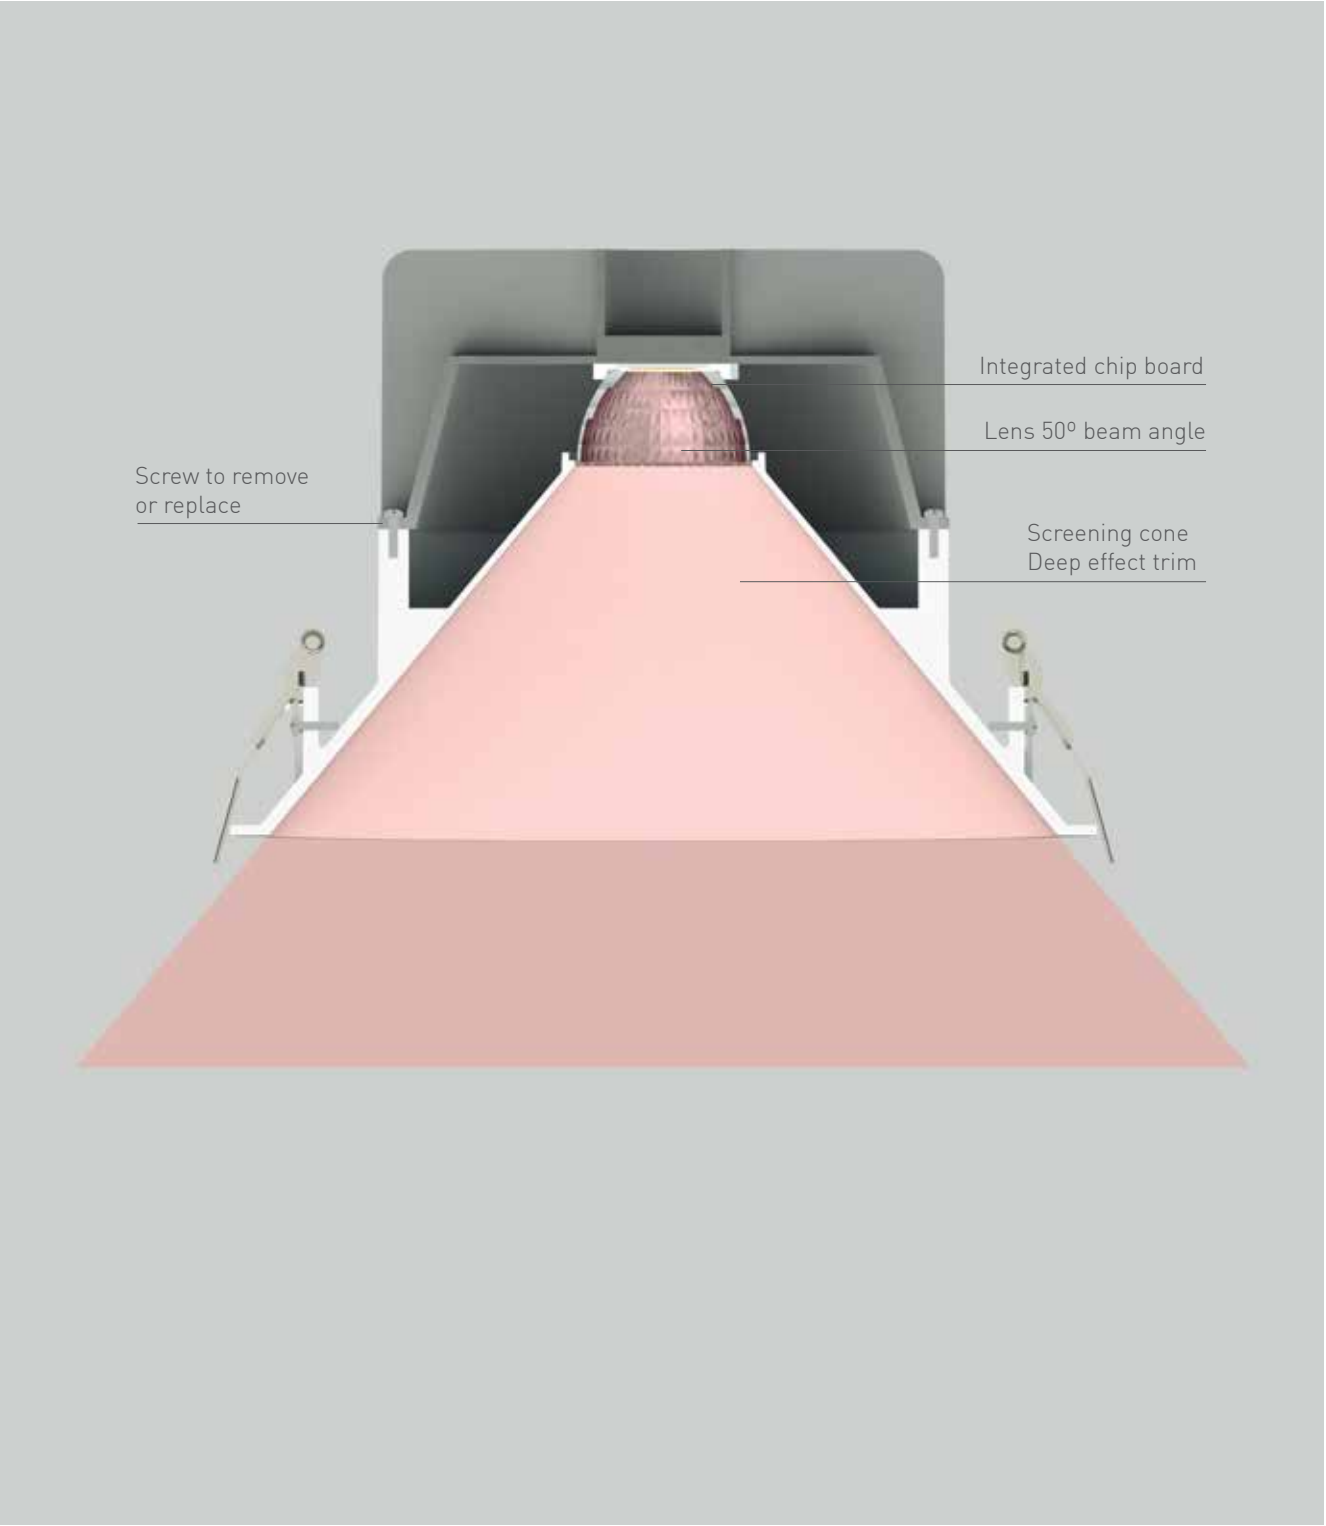



CAVE 03

7IA536 03 - 2 2 J 3 - 90

1

2

3

4

5

6

7

1 - Model	2 - Power	3 - Driver	4 - Warranty	5 - Degree	6 - K	7 - Color
7IA536	3W	2- ON/OFF 220-240V PF>0,5	2- 5 Years Warranty Other driver Incl.	J- 30°	2- 2700K 194 lm system 268 lm source 3- 3000K 204 lm system 286 lm source 4- 4000K 215 lm system 286 lm source	01- Black 09- Tec. Gold 90- Tec. White

35

35

Ø 30

ALUM

PC




CAVE 05



7IA536 05 - 2 1 W 3 - 90
1 2 3 4 5 6 7


1 - Model	2 - Power	3 - Driver	4 - Warranty	5 - Degree	6 - K	7 - Color
7IA536	5W	2- ON/OFF 220-240V PF>0,9	1- 5 Years Warranty JISO driver Incl.	W- 50°	2- 2700K 485 lm system 641 lm source 3- 3000K 497 lm system 661 lm source 4- 4000K 510 lm system 675 lm source	01- Black 09- Tec. Gold 90- Tec. White





71A536 10 - 2 1 W 3 - 90
1 2 3 4 5 6 7

1 - Model	2 - Power	3 - Driver	4 - Warranty	5 - Degree	6 - K	7 - Color
71A536	10W	2- ON/OFF 220-240V PF>0,9 3 - 1-10V 200-240V PF>0,95 5- Trailing Edge 220-240V PF>0,95 D- DALI / PUSH 200-240V PF>0,95 SMART CONTROL <i>[See page. 324]</i>	1- 5 Years Warranty JISO driver Incl. <i>(Option Driver 2 - 5)</i> 2- 5 Years Warranty Other driver Incl. <i>(Option Driver 3 - D)</i>	W- 50°	2- 2700K 894 lm system 1311 lm source 3- 3000K 941 lm system 1353 lm source 4- 4000K 988 lm system 1380 lm source	01- Black 09- Tec. Gold 90- Tec. White



Accessories not included

Trim to cover hole 75-90

DC51010-01

DC51010-09


DC51010-90

Emergency kit *[page 322]*

2DCLEDK1

2DCLEDK2





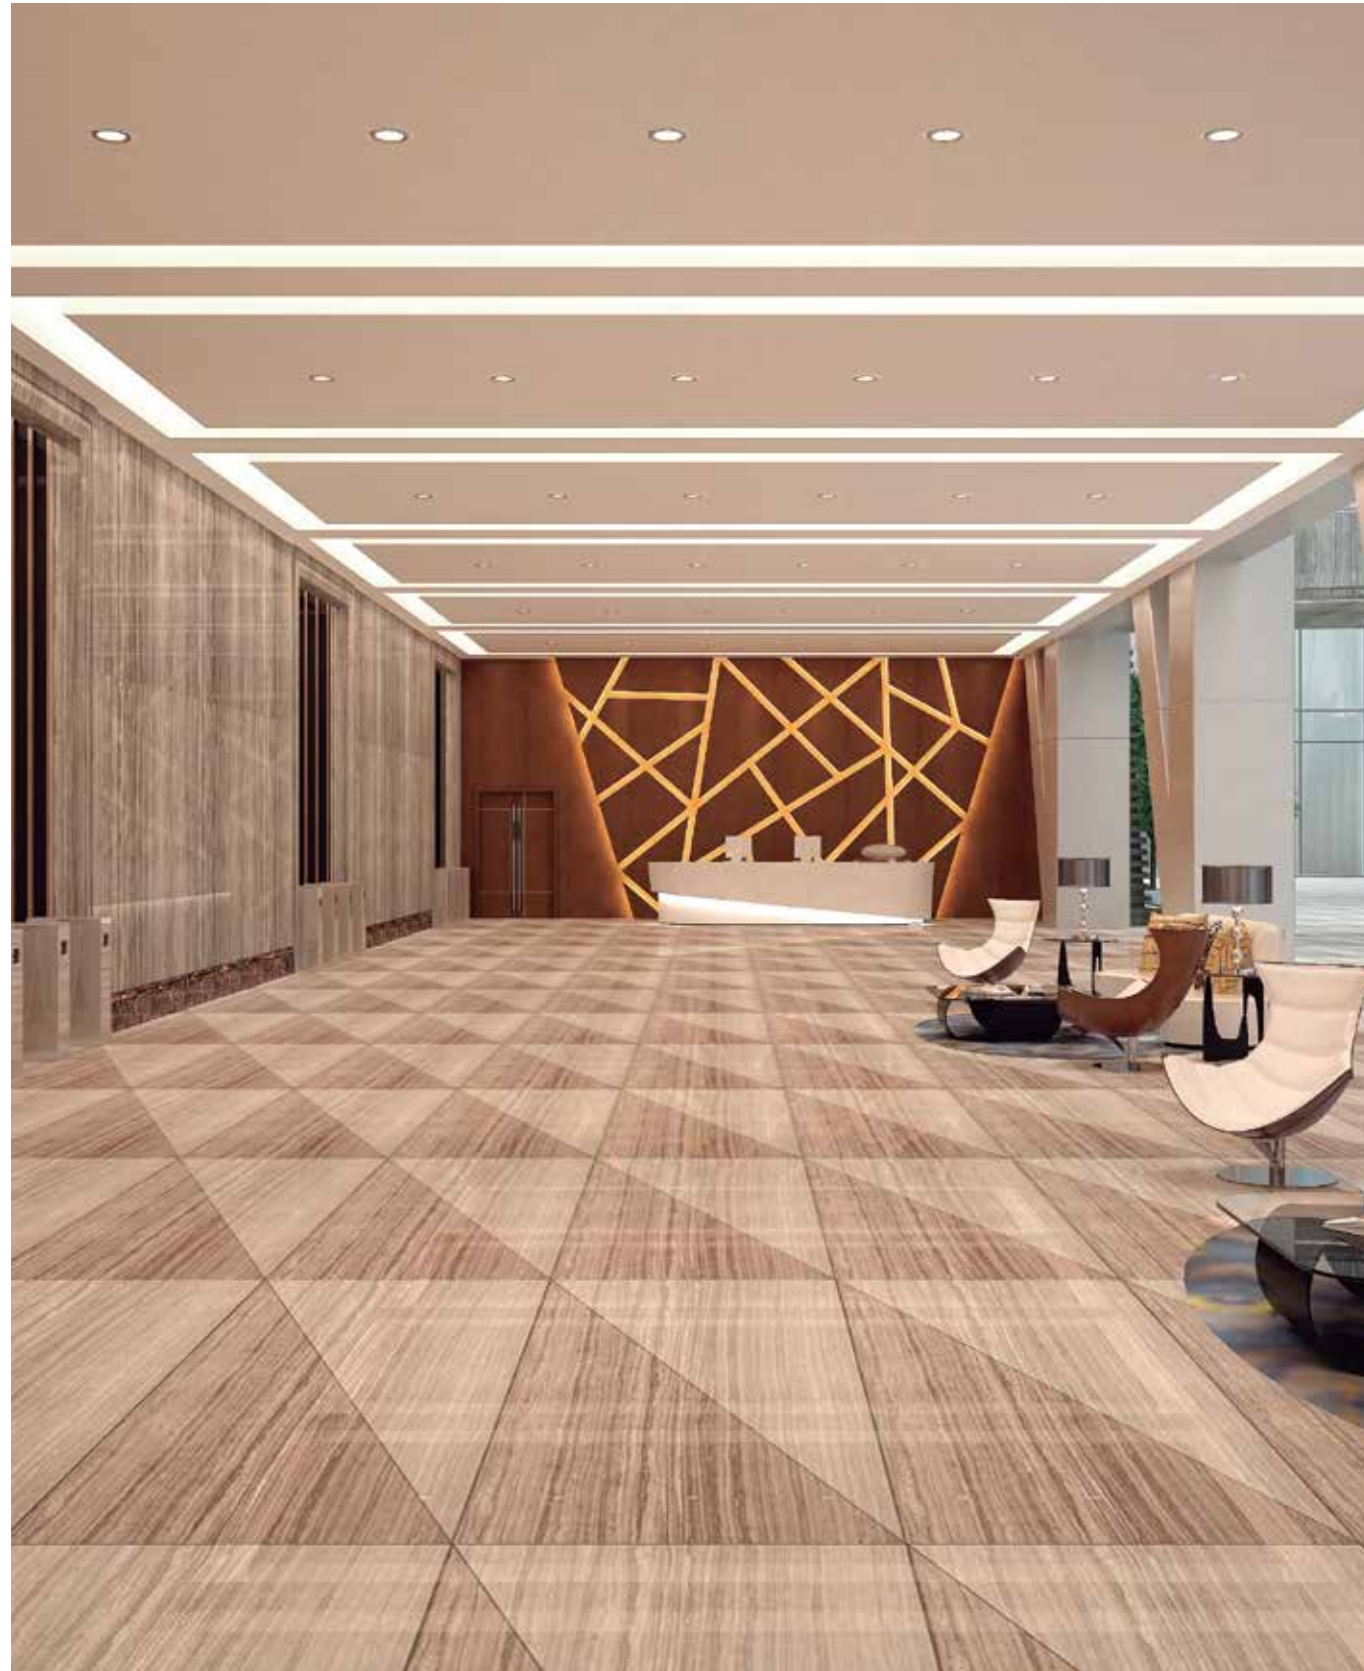

CAVE 15

71A536 15 - 2 1 W 0 - 90

1 - Model	2 - Power	3 - Driver	4 - Warranty	5 - Degree	6 - K	7 - Color
7IA536	15W	 2- ON/OFF 220-240V PF>0,9  4- DALI/PUSH/1-10V 200-240V PF>0,95  5- Trailing Edge 220-240V PF>0,9  SMART CONTROL <i>(See page. 324)</i>	1- 5 Years Warranty JISO driver Incl. <i>(Option Driver 2 - 5)</i> 2- 5 Years Warranty Other driver Incl. <i>(Option Driver 4)</i>	W- 50°	0 - CCT Switch 2700K - 3000K -4000K 2700K 1235 lm source 3000K 1719 lm source 4000K 1753 lm source	 01- Black  09- Tec. Gold  90- Tec. White



Accessories not included

Trim to cover hole  95-110

DC51015-01



DC51015-90

Emergency kit (page 322-323)

 2DCLEDK5 2DCLEDK29





CAVE 22

7IA536 22 - 2 1 W 0 - 90

1 2 3 4 5 6 7

1 - Model	2 - Power	3 - Driver	4 - Warranty	5 - Degree	6 - K	7 - Color
7IA536	22W	2- ON/OFF 220-240V PF>0,95 4- DALI/PUSH/1-10V 200-240V PF>0,95 5- Trailing Edge 220-240V PF>0,9 <i>(only with JISO driver)</i> SMART CONTROL <i>(See page. 324)</i>	1- 5 Years Warranty JISO driver Incl. <i>(Option Driver 2 - 5)</i> 2- 5 Years Warranty Other driver Incl. <i>(Option Driver 4)</i>	W- 50°	0 - CCT Switch 2700K - 3000K -4000K 2700K 1961 lm source 3000K 2544 lm source 4000K 2600 lm source	01- Black 90- Tec. White



Ø 145



7IA536 33 - 2 1 W 0 - 90

1 2 3 4 5 6 7

1 - Model	2 - Power	3 - Driver	4 - Warranty	5 - Degree	6 - K	7 - Color
7IA536	30W	2- ON/OFF 220-240V PF>0,9 4- DALI/PUSH/1-10V 200-240V PF>0,95 5- Trailing Edgew 220-240V PF>0,9 SMART CONTROL <i>(See page. 324)</i>	1- 5 Years Warranty JISO driver Incl. <i>(Option Driver 2 - 5)</i> 2- 5 Years Warranty Other driver Incl. <i>(Option Driver 4)</i>	W- 50°	0 - CCT Switch 2700K - 3000K -4000K 2700K 2745 lm source 3000K 3562 lm source 4000K 3640 lm source	01- Black 90- Tec. White

Accessories not included

Trim to cover hole  145-165

DC51033-01

DC51033-90

Emergency kit *(page 322-323)*

2DCLEDK5

2DCLEDK29






7IA536 30 - 2 1 W 0 - 90

1 2 3 4 5 6 7

1 - Model	2 - Power	3 - Driver	4 - Warranty	5 - Degree	6 - K	7 - Color
7IA536	30W	2- ON/OFF 220-240V PF>0,9 4- DALI/PUSH/1-10V 200-240V PF>0,95 5- Trailing Edge 220-240V PF>0,9 SMART CONTROL <i>(See page. 324)</i>	1- 5 Years Warranty JISO driver Incl. <i>(Option Driver 2 - 5)</i> 2- 5 Years Warranty Other driver Incl. <i>(Option Driver 4)</i>	W- 50°	0 - CCT 2700K - 3000K -4000K 2700K 2745 lm source 3000K 3941 lm source 4000K 4021 lm source	01- Black 90- Tec. White

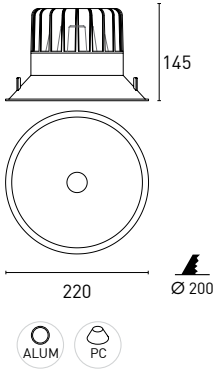

Accessories not included

Trim to cover hole  200-230

 DC51040-01

 DC51040-90

Emergency kit *(page 322-323)*

 2DCLEDK5

 2DCLEDK29







CAVE RW10

7IA538 10 - 2 1 W 3 - 90
1 2 3 4 5 6 7

1 - Model	2 - Power	3 - Driver	4 - Warranty	5 - Degree	6 - K	7 - Color
7IA538	10W	2- ON/OFF 220-240V PF>0,9 3 - 1-10V 200-240V PF>0,95 5- Trailing Edge 220-240V PF>0,95 D- DALI / PUSH 200-240V PF>0,95 SMART CONTROL (See page. 324)	1- 5 Years Warranty JISO driver Incl. (Option Driver 2 - 5) 2- 5 Years Warranty Other driver Incl. (Option Driver 3 - D)	W- 50° (WallWasher)	2- 2700K 894 lm system 1311 lm source 3- 3000K 941 lm system 1353 lm source 4- 4000K 988 lm system 1380 lm source	01- Black 09- Tec. Gold 90- Tec. White



Accessories not included

Trim to cover hole 75-90

 DC51010-01

 DC51010-09

 DC51010-90

Emergency kit (page 322)

 2DCLEDK1

 2DCLEDK2



