

**TOP
DESIGN**

THE ESSENCE OF
LIGHT, NATURE & LIFE

Cave

7 Model
6 Power
P. 72

Lake


12 Model
3 Power
P. 96

AM

BI

EN

CE

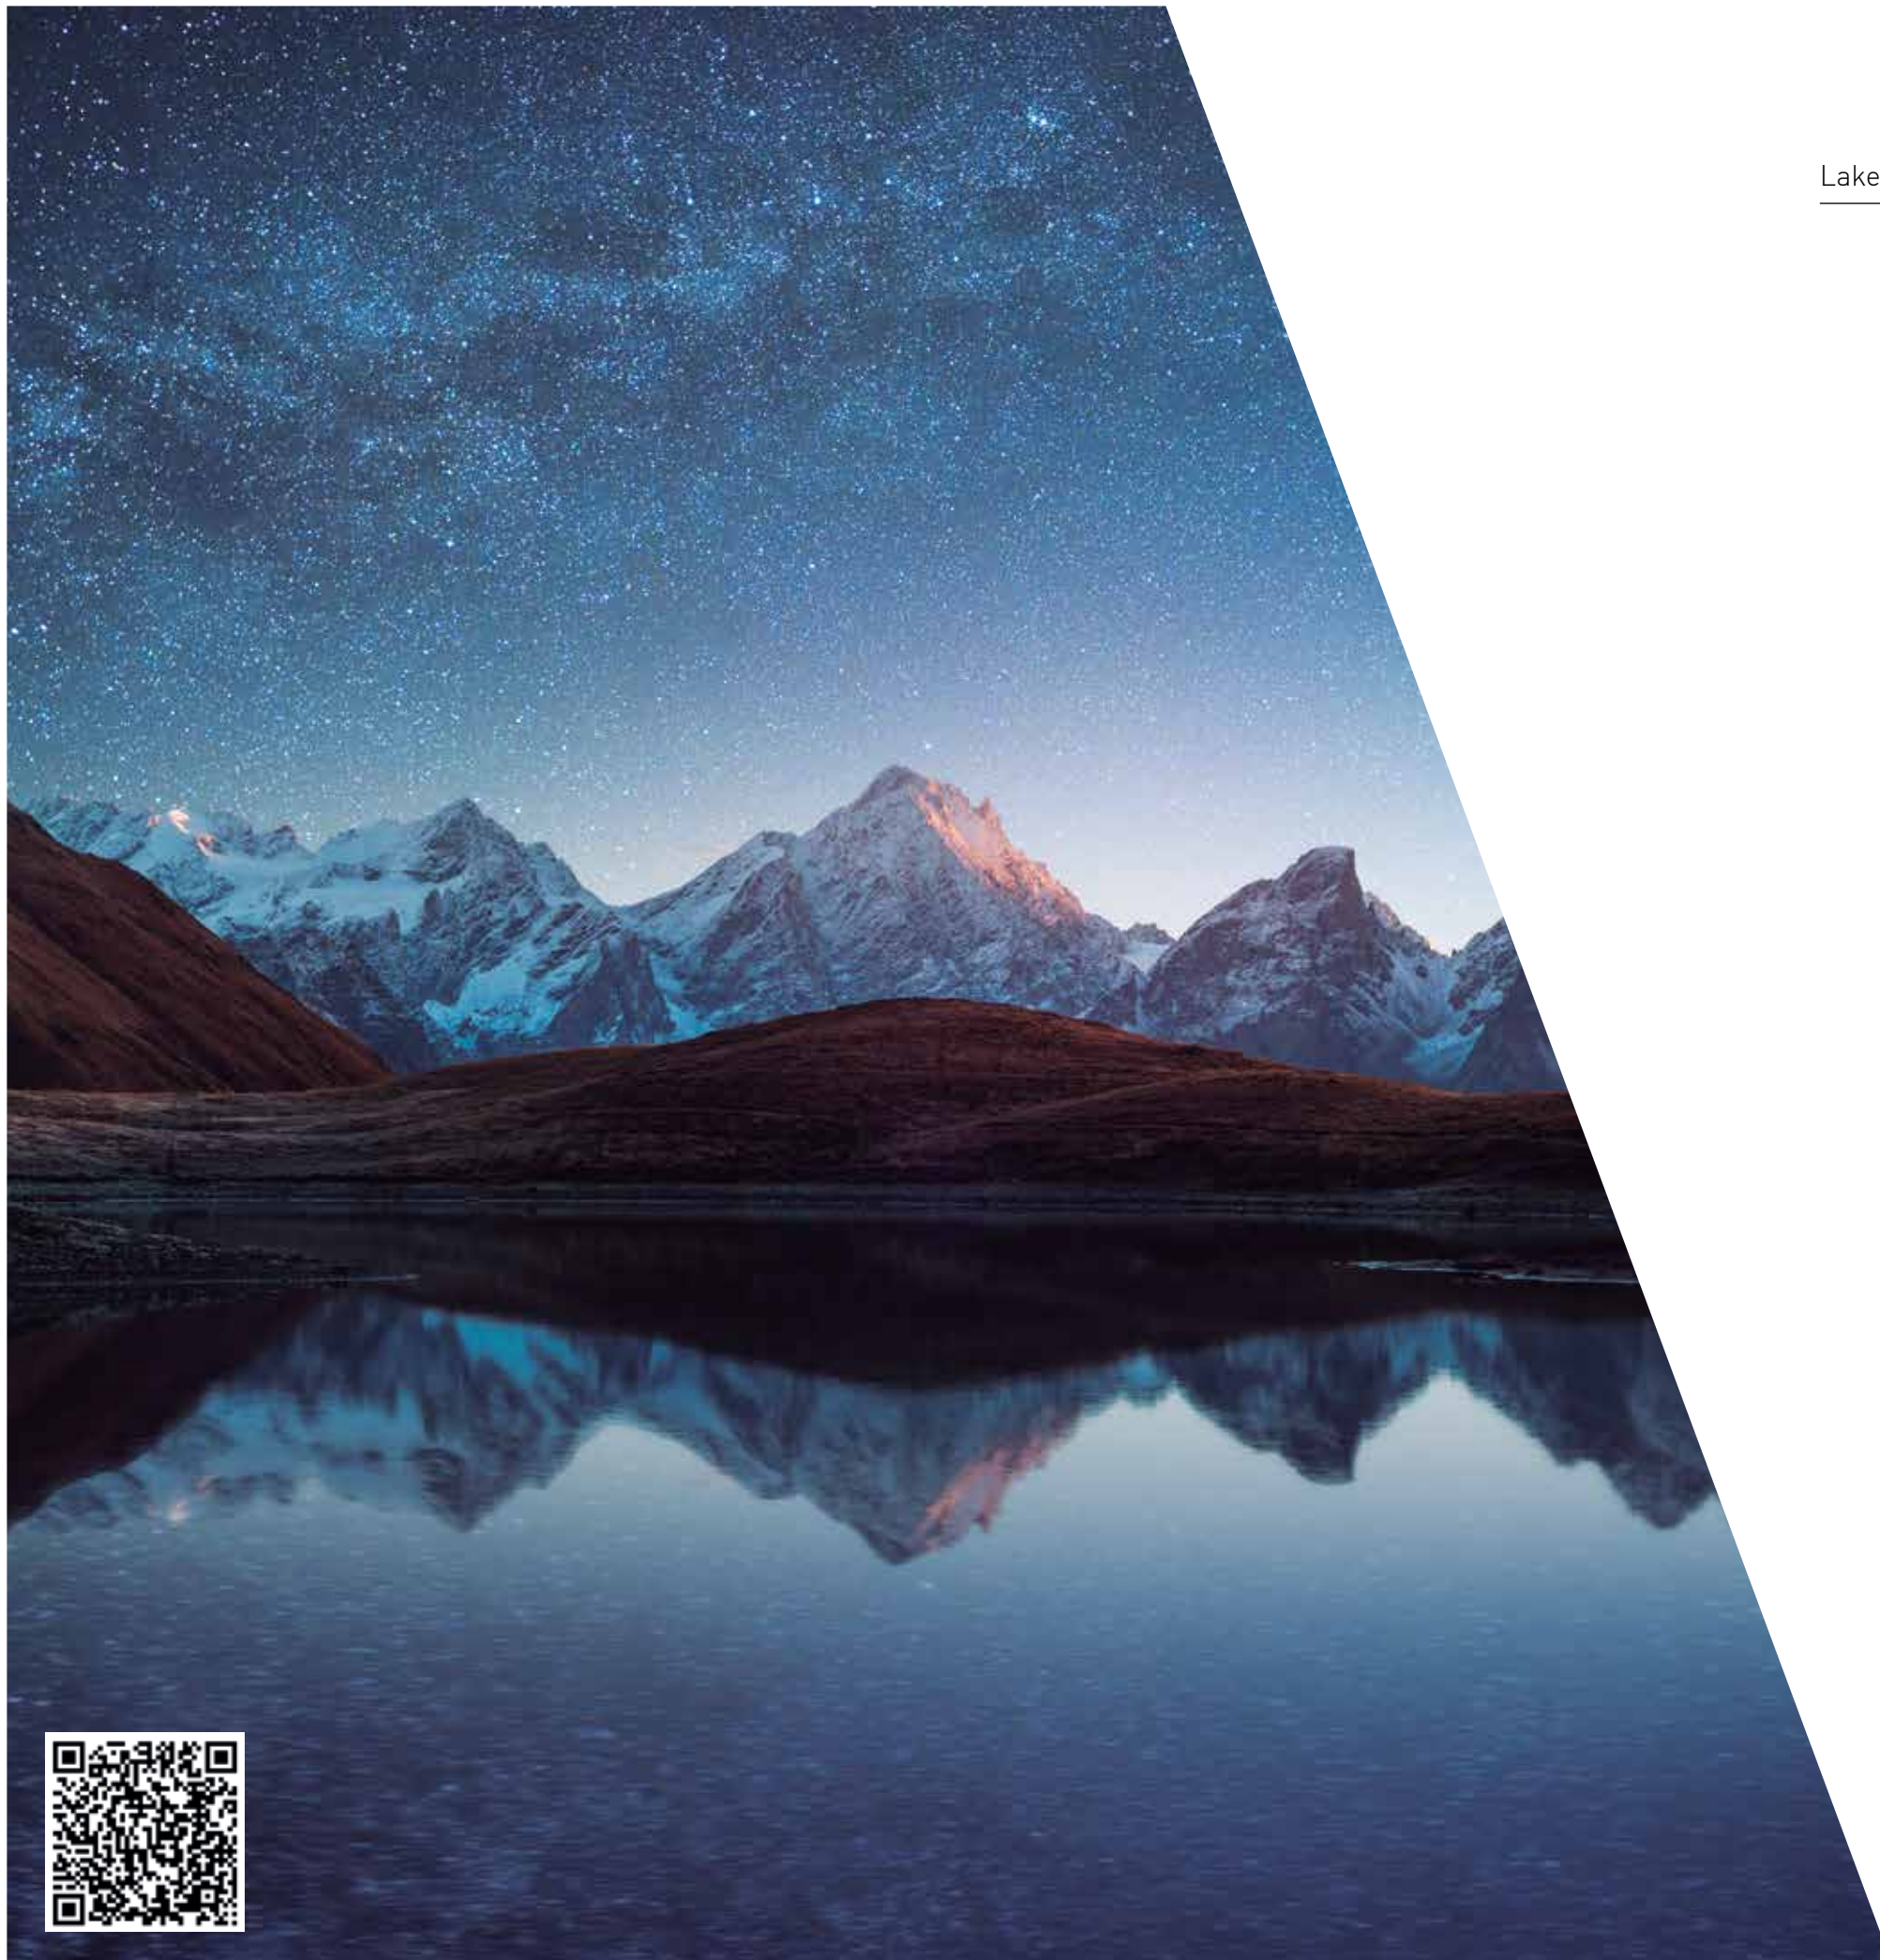

Lake



LAKE R10
10W - P105



LAKE R20
20W - P107



LAKE R30
30W - P109



LAKE RS10
10W - P111



LAKE RS20
20W - P112



LAKE RS30
30W - P113



LAKE RT10
10W - P115



LAKE RTS10
10W - P115



LAKE RTW10
10W - P117



LAKE RTWC10
10W - P117



LAKE RW10
10W - P118



LAKE RWC10
10W - P119



Las luces de Lake iluminan como el reflejo del atardecer en las aguas del lago. Una sensación de paz e inmensidad presentada por la naturaleza y las luminarias Lake.


The lights of LAKE illuminate like the reflection of the sunset in the waters of the lake. A sense of peace and vastness presented by nature and LAKE lighting.



Deep anti-glare



Downlights with
extra wide flood
light distribtion



Lens wallwashers




Downlights with
oval flood
light distribtion



Directional luminaires



Precise angle alignment
Self-contained led engine will be open/closed via twist&lock system

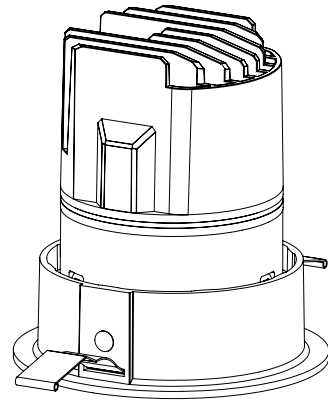

Advanced ceiling installation



Ceiling thickness
4mm to 25mm

Ceiling thickness
2mm to 25mm



Standard Trim

Trimless installation



Normal IP rating: IP20
Maximum IP rating: IP65

High quality LED IP65:
CREE COB CRI>90

Perfect Optical control:
15°, 24°, 38°, 50°

IP20/IP65 protection

Optional accessories:
honey comb / striped glass
UGR<17, cutoff angle >35°, offers excellent visual confort



Striped Glass
Honey Comb


Reflector Color



Technical White

Chrome

Black

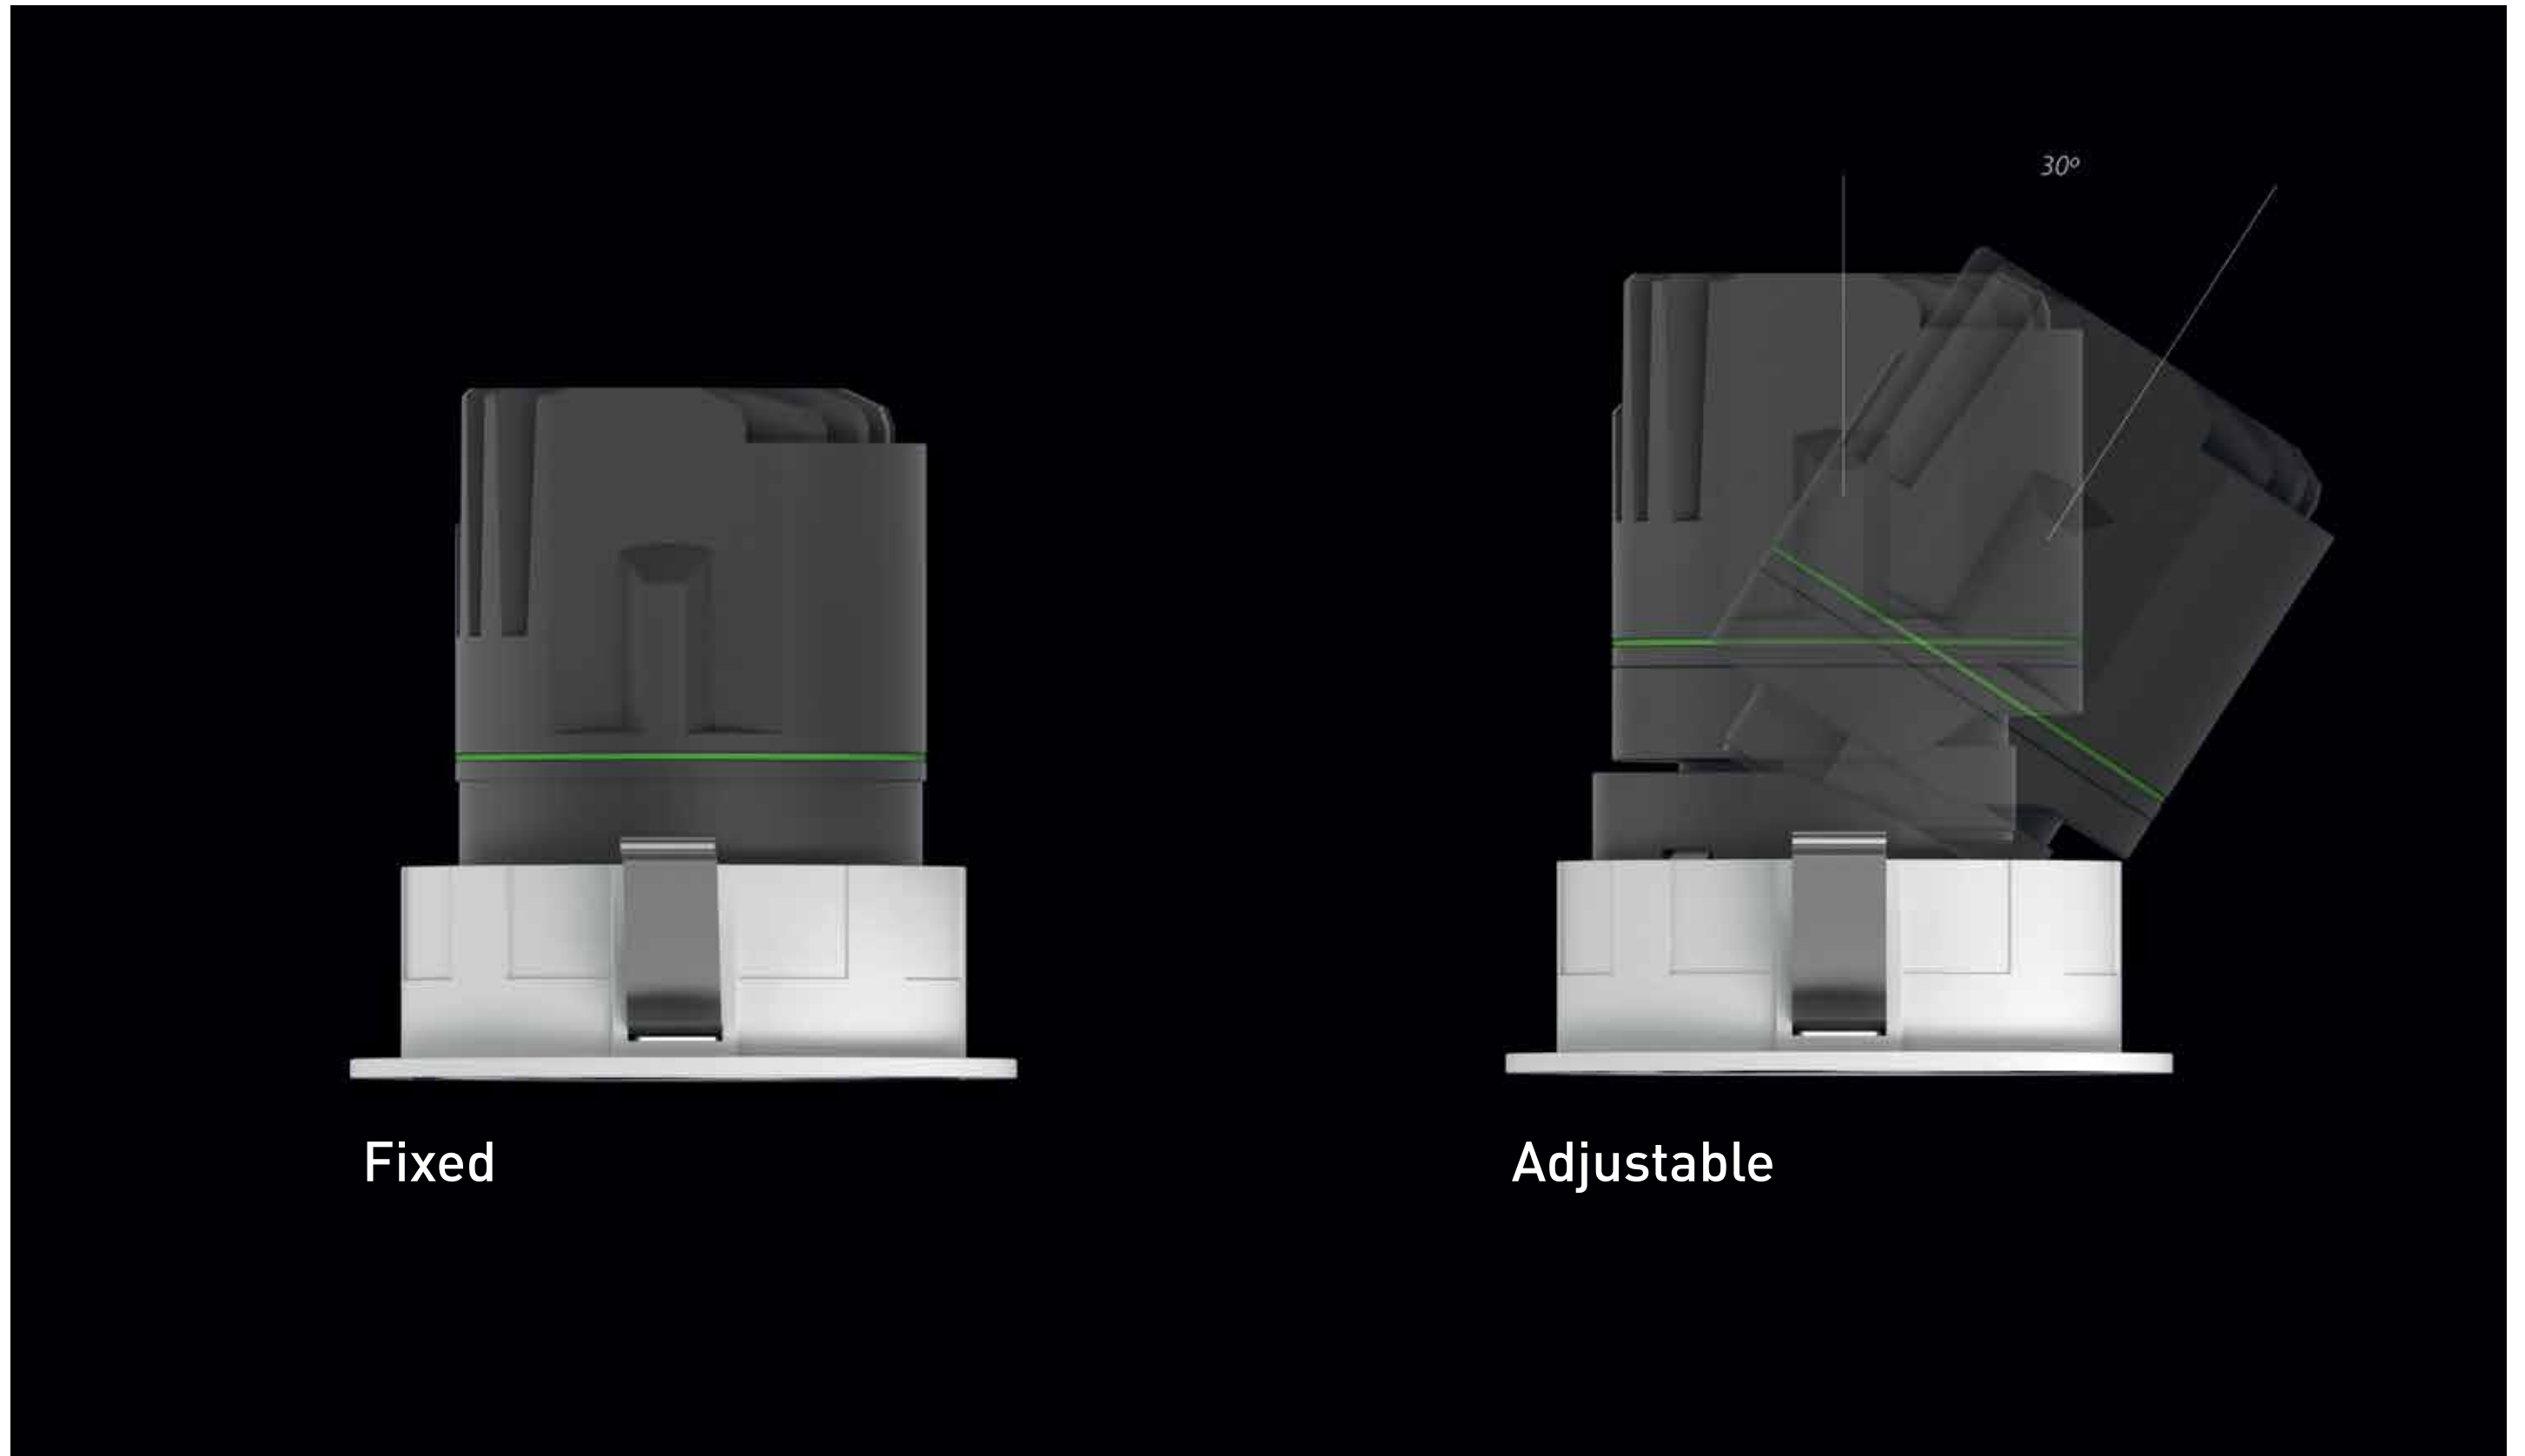




LAKE R10



7IA580 10 - 2 1 M 3 - 9011
1 2 3 4 5 6 7

1 - Model	2 - Power	3 - Driver	4 - Warranty	5 - Degree	6 - K	7 - Color
7IA580	10W	<p>2- ON/OFF 220-240V PF>0,9</p> <p>3 - 1-10V 200-240V PF>0,95</p> <p>5- Trailing Edge 220-240V PF>0,95</p> <p>D- DALI/PUSH 200-240V PF>0,95</p> <p>SMART CONTROL (See page. 324)</p>	<p>1- 5 Years Warranty JISO driver Incl. (Option Driver 2 - 5)</p> <p>2- 5 Years Warranty Other driver Incl. (Option Driver 3 - D)</p>	<p>A- 15°</p> <p>I- 24°</p> <p>M- 38°</p> <p>W- 50°</p>	<p>2- 2700K 626 lm system 1134 lm source (38°)</p> <p>3- 3000K 659 lm system 1197 lm source (38°)</p> <p>4- 4000K 692 lm system 1269 lm source (38°)</p>	<p>9001- Tec. White- Black</p> <p>9011- Tec. White- Chrome</p> <p>9090- Tec. White</p>

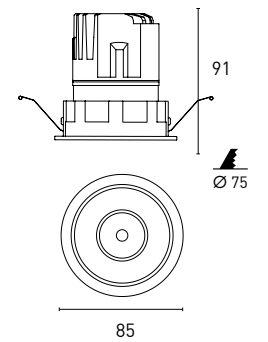

Accessories not included

- DC58010-H
- DC58010-S
- Emergency kit (page 322)**
- 2DCLEDK1
- 2DCLEDK2







LAKE R20




7IA580 20 - 2 1 M 4 - 9011
1 2 3 4 5 6 7

1 - Model	2 - Power	3 - Driver	4 - Warranty	5 - Degree	6 - K	7 - Color
7IA580	20W	<p>2- ON/OFF 220-240V PF>0,95</p> <p>4- DALI/PUSH/1-10V 200-240V PF>0,95</p> <p>5- Trailing Edge 220-240V PF>0,95</p> <p>SMART CONTROL <i>[See page. 324]</i></p>	<p>1- 5 Years Warranty JISO driver Incl. <i>(Option Driver 2 - 5)</i></p> <p>2- 5 Years Warranty Other driver Incl. <i>(Option Driver 4)</i></p>	<p>A- 15°</p> <p>I- 24°</p> <p>M- 38°</p> <p>W- 50°</p>	<p>4- 4000K 1552 lm system 2475 lm source <i>[38°]</i></p>	<p>9011- Tec. White- Chrome</p> <p>9090- Tec. White</p>



Accessories not included

Emergency kit *(page 322-323)*



The above information is basic. For updated and more accurate information, please consult Technical Data Sheet on www.jisoiluminacion.com





LAKE R30




7IA580 30 - 2 1 M 4 - 9011
1 2 3 4 5 6 7

1 - Model	2 - Power	3 - Driver	4 - Warranty	5 - Degree	6 - K	7 - Color
7IA580	30W	<ul style="list-style-type: none"> 2- ON/OFF 220-240V PF>0,9 4- DALI/PUSH/1-10V 220-240V PF>0,95 5- Trailing Edge 220-240V PF>0,9 SMART CONTROL (See page. 324) 	<ul style="list-style-type: none"> 1- 5 Years Warranty JISO driver Incl. (Option Driver 2 - 5) 2- 5 Years Warranty Other driver Incl. (Option Driver 4) 	<ul style="list-style-type: none"> A- 15° I- 24° M- 38° W- 50° 	<ul style="list-style-type: none"> 4- 4000K 2666 lm system 3713 lm source (38°) 	<ul style="list-style-type: none"> 9011- Tec. White-Chrome 9090- Tec. White



Accessories not included

Emergency kit (page 322-323)






LAKE RS10



7IA585 10 - 2 1 M 3 - 9011
1 2 3 4 5 6 7

1 - Model	2 - Power	3 - Driver	4 - Warranty	5 - Degree	6 - K	7 - Color
7IA585	10W	<p>2- ON/OFF 220-240V PF>0,9</p> <p>3 - 1-10V 200-240V PF>0,95</p> <p>5- Trailing Edge 220-240V PF>0,9</p> <p>D- DALI/PUSH 200-240V PF>0,95</p> <p>SMART CONTROL (See page. 324)</p>	<p>1- 5 Years Warranty JISO driver Incl. (Option Driver 2 - 5)</p> <p>2- 5 Years Warranty Other driver Incl. (Option Driver 3 - D)</p>	<p>A- 15°</p> <p>I- 24°</p> <p>M- 38°</p> <p>W- 50°</p>	<p>2- 2700K 626 lm system 1134 lm source (38°)</p> <p>3- 3000K 659 lm system 1197 lm source (38°)</p> <p>4- 4000K 692 lm system 1269 lm source (38°)</p>	<p>9001- Tec. White- Black</p> <p>9011- Tec. White- Chrome</p> <p>9090- Tec. White</p>

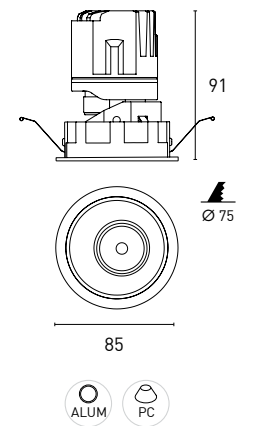

Accessories not included

- DC58010-H
- DC58010-S
- Emergency kit** (page 322)
- 2DCLEDK1
- 2DCLEDK2






The above information is basic. For updated and more accurate information, please consult Technical Data Sheet on www.jisoiluminacion.com



LAKE RS20

7IA585 20 - 2 1 M 4 - 9011
1 2 3 4 5 6 7



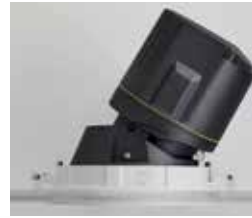


1 - Model	2 - Power	3 - Driver	4 - Warranty	5 - Degree	6 - K	7 - Color
7IA585	20W	2- ON/OFF 220-240V PF>0,95	1- 5 Years Warranty JISO driver Incl. <i>(Option Driver 2 - 5)</i>	A- 15°	4- 4000K 1552 lm system 2475 lm source <i>(38°)</i>	9011- Tec. White- Chrome
		4- DALI/PUSH/1-10V 200-240V PF>0,95	2- 5 Years Warranty Other driver Incl. <i>(Option Driver 4)</i>	I- 24°		9090- Tec. White
		5- Trailing Edge 220-240V PF>0,95		M- 38°		
		SMART CONTROL <i>(See page. 324)</i>		W- 50°		



LAKE RS30

7IA585 30 - 2 1 M 4 - 9011
1 2 3 4 5 6 7

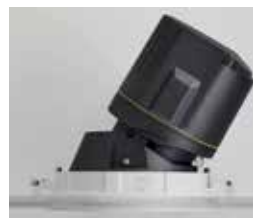

1 - Model	2 - Power	3 - Driver	4 - Warranty	5 - Degree	6 - K	7 - Color
7IA585	30W	2- ON/OFF 220-240V PF>0,95	1- 5 Years Warranty JISO driver Incl. <i>(Option Driver 2 - 5)</i>	A- 15°	4- 4000K 2666 lm system 3713 lm source <i>(38°)</i>	9011- Tec. White- Chrome
		4- DALI/PUSH/1-10V 220-240V PF>0,95	2- 5 Years Warranty Other driver Incl. <i>(Option Driver 4)</i>	I- 24°		9090- Tec. White
		5- Trailing Edge 220-240V PF>0,95		M- 38°		
		SMART CONTROL <i>(See page. 324)</i>		W- 50°		



Accessories not included

Emergency kit *(page 322-323)*

- 2DCLEDK5
- 2DCLEDK29

Accessories not included

Emergency kit *(page 322-323)*

- 2DCLEDK5
- 2DCLEDK29



The above information is basic. For updated and more accurate information, please consult Technical Data Sheet on www.jisoiluminacion.com











Accessories not included

-  DC58010-H
-  DC58010-S




Emergency kit (page 322)

-  2DCLEDK1
-  2DCLEDK2




71A680 10 - 2 1 M 3 - 9011
1 2 3 4 5 6 7

1 - Model	2 - Power	3 - Driver	4 - Warranty	5 - Degree	6 - K	7 - Color
71A680	10W	<ul style="list-style-type: none">  2- ON/OFF 220-240V PF>0,9  3 - 1-10V 200-240V PF>0,95  5- Trailing Edge 220-240V PF>0,95  D- DALI/PUSH 200-240V PF>0,95  SMART CONTROL (See page. 324) 	<ul style="list-style-type: none"> 1- 5 Years Warranty JISO driver Incl. (Option Driver 2 - 5) 2- 5 Years Warranty Other driver Incl. (Option Driver 3 - D) 	<ul style="list-style-type: none"> A- 15° I- 24° M- 38° W- 50° 	<ul style="list-style-type: none"> 2- 2700K 626 lm system 1134 lm source [38°] 3- 3000K 659 lm system 1197 lm source [38°] 4- 4000K 692 lm system 1269 lm source [38°] 	<ul style="list-style-type: none">  9001- Tec. White-Black  9011- Tec. White-Chrome  9090- Tec. White






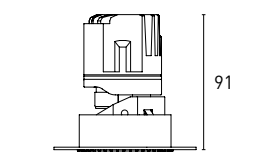


LAKE RT10



LAKE RTS10




71A685 10 - 2 1 M 3 - 9011
1 2 3 4 5 6 7

1 - Model	2 - Power	3 - Driver	4 - Warranty	5 - Degree	6 - K	7 - Color
71A685	10W	<ul style="list-style-type: none">  2- ON/OFF 220-240V PF>0,9  3 - 1-10V 200-240V PF>0,95  5- Trailing Edge 220-240V PF>0,95  D- DALI/PUSH 200-240V PF>0,95  SMART CONTROL (See page. 324) 	<ul style="list-style-type: none"> 1- 5 Years Warranty JISO driver Incl. (Option Driver 2 - 5) 2- 5 Years Warranty Other driver Incl. (Option Driver 3 - D) 	<ul style="list-style-type: none"> A- 15° I- 24° M- 38° W- 50° 	<ul style="list-style-type: none"> 2- 2700K 626 lm system 1134 lm source [38°] 3- 3000K 659 lm system 1197 lm source [38°] 4- 4000K 692 lm system 1269 lm source [38°] 	<ul style="list-style-type: none">  9001- Tec. White-Black  9011- Tec. White-Chrome  9090- Tec. White



The above information is basic. For updated and more accurate information, please consult Technical Data Sheet on www.jisoiluminacion.com

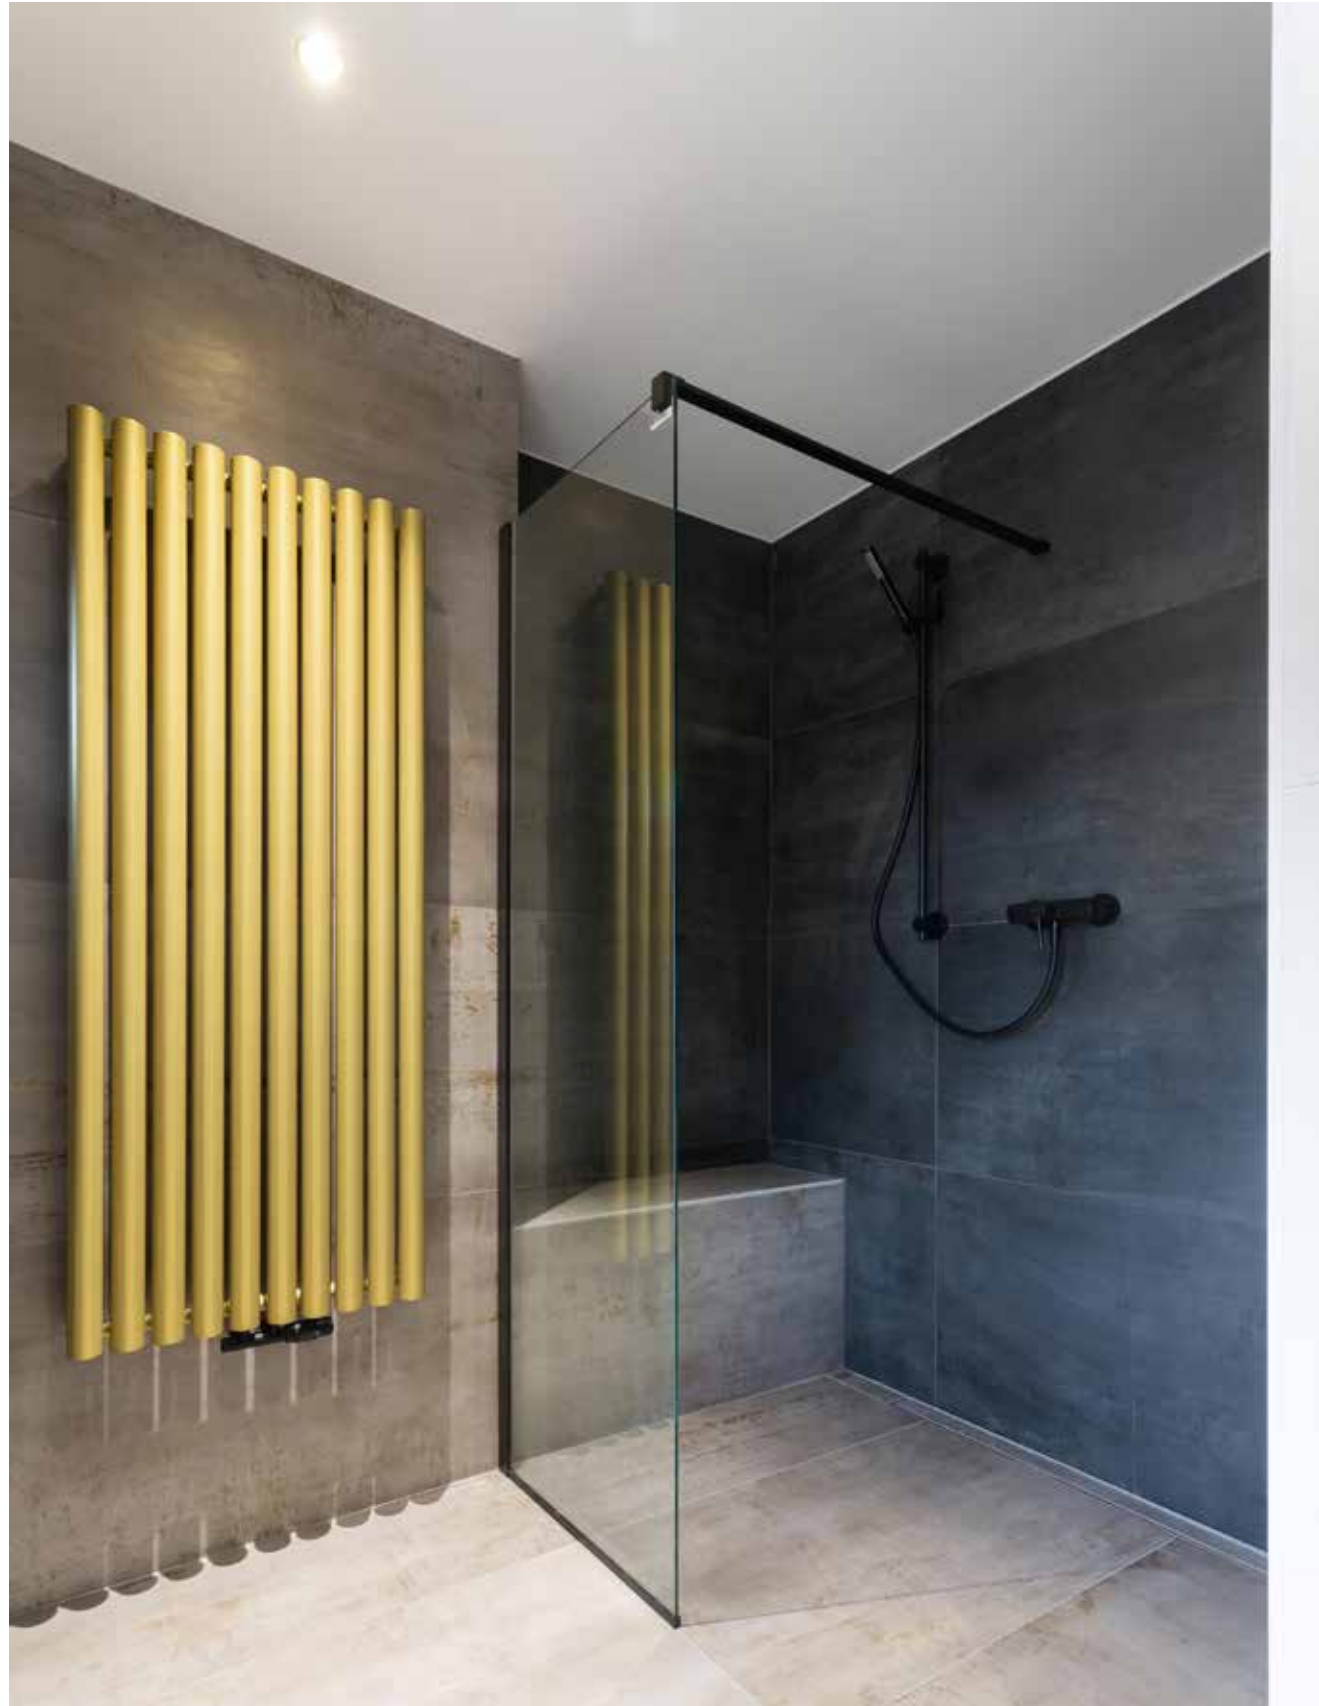


LAKE RTW10



71A683 10 - 2 1 0 3 - 9090
1 2 3 4 5 6 7

1 - Model	2 - Power	3 - Driver	4 - Warranty	5 - Degree	6 - K	7 - Color
71A683	10W	<ul style="list-style-type: none"> 2- ON/OFF 220-240V PF>0,9 3 - 1-10V 200-240V PF>0,95 5- Trailing Edge 220-240V PF>0,95 D- DALI/PUSH 200-240V PF>0,95 SMART CONTROL [See page. 324] 	<ul style="list-style-type: none"> 1- 5 Years Warranty JISO driver Incl. [Option Driver 2 - 5] 2- 5 Years Warranty Other driver Incl. [Option Driver 3 - D] 	0 - Wall Washer	<ul style="list-style-type: none"> 3- 3000K 759 lm system 1163 lm source 4- 4000K 797 lm system 1238 lm source 	9090- Tec. White

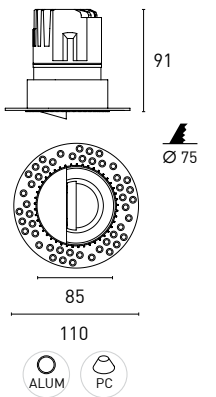

Accessories not included

Emergency kit (page 322)


-  2DCLEDK1
-  2DCLEDK2

LAKE RTWC10



71A684 10 - 2 1 0 3 - 9090
1 2 3 4 5 6 7

1 - Model	2 - Power	3 - Driver	4 - Warranty	5 - Degree	6 - K	7 - Color
71A684	10W	<ul style="list-style-type: none"> 2- ON/OFF 220-240V PF>0,9 3 - 1-10V 200-240V PF>0,95 5- Trailing Edge 220-240V PF>0,95 D- DALI/PUSH 200-240V PF>0,95 SMART CONTROL [See page. 324] 	<ul style="list-style-type: none"> 1- 5 Years Warranty JISO driver Incl. [Option Driver 2 - 5] 2- 5 Years Warranty Other driver Incl. [Option Driver 3 - D] 	0 - Wall Washer	<ul style="list-style-type: none"> 3- 3000K 759 lm system 1163 lm source 4- 4000K 797 lm system 1238 lm source 	9090- Tec. White

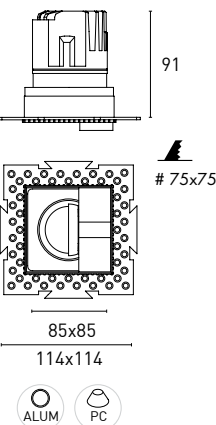

Accessories not included

Emergency kit (page 322-323)



-  2DCLEDK5
-  2DCLEDK29





LAKE RW10

71A583 10 - 2 1 0 3 - 9090
1 2 3 4 5 6 7



85



1 - Model	2 - Power	3 - Driver	4 - Warranty	5 - Degree	6 - K	7 - Color
71A583	10W	<ul style="list-style-type: none"> 2- ON/OFF 220-240V PF>0,9 3 - 1-10V 200-240V PF>0,95 5- Trailing Edge 220-240V PF>0,95 D- DALI/PUSH 200-240V PF>0,95 SMART CONTROL (See page. 324) 	<ul style="list-style-type: none"> 1- 5 Years Warranty JISO driver Incl. (Option Driver 2 - 5) 2- 5 Years Warranty Other driver Incl. (Option Driver 3 - D) 	0 - Wall Washer	<ul style="list-style-type: none"> 3- 3000K 759 lm system 1163 lm source 4- 4000K 797 lm system 1238 lm source 	9090- Tec. White

Accessories not included



Emergency kit (page 322)

- 2DCLEDK1
- 2DCLEDK2



LAKE RWC10

71A584 10 - 2 1 0 3 - 9090
1 2 3 4 5 6 7



85x85



1 - Model	2 - Power	3 - Driver	4 - Warranty	5 - Degree	6 - K	7 - Color
71A584	10W	<ul style="list-style-type: none"> 2- ON/OFF 220-240V PF>0,9 3 - 1-10V 200-240V PF>0,95 5- Trailing Edge 220-240V PF>0,95 D- DALI/PUSH 200-240V PF>0,95 SMART CONTROL (See page. 324) 	<ul style="list-style-type: none"> 1- 5 Years Warranty JISO driver Incl. (Option Driver 2 - 5) 2- 5 Years Warranty Other driver Incl. (Option Driver 3 - D) 	0 - Wall Washer	<ul style="list-style-type: none"> 3- 3000K 759 lm system 1163 lm source 4- 4000K 797 lm system 1238 lm source 	9090- Tec. White

Accessories not included

Emergency kit (page 322-323)

- 2DCLEDK5
- 2DCLEDK29



The above information is basic. For updated and more accurate information, please consult Technical Data Sheet on www.jisoiluminacion.com

