

**TOP
DESIGN**

THE ESSENCE OF
LIGHT, NATURE & LIFE

DOTS

Eagle


5 Model
3 Power
P. 122

Owl

3 Model
3 Power
P. 134

Hawk

6 Model
20 Power
P. 142

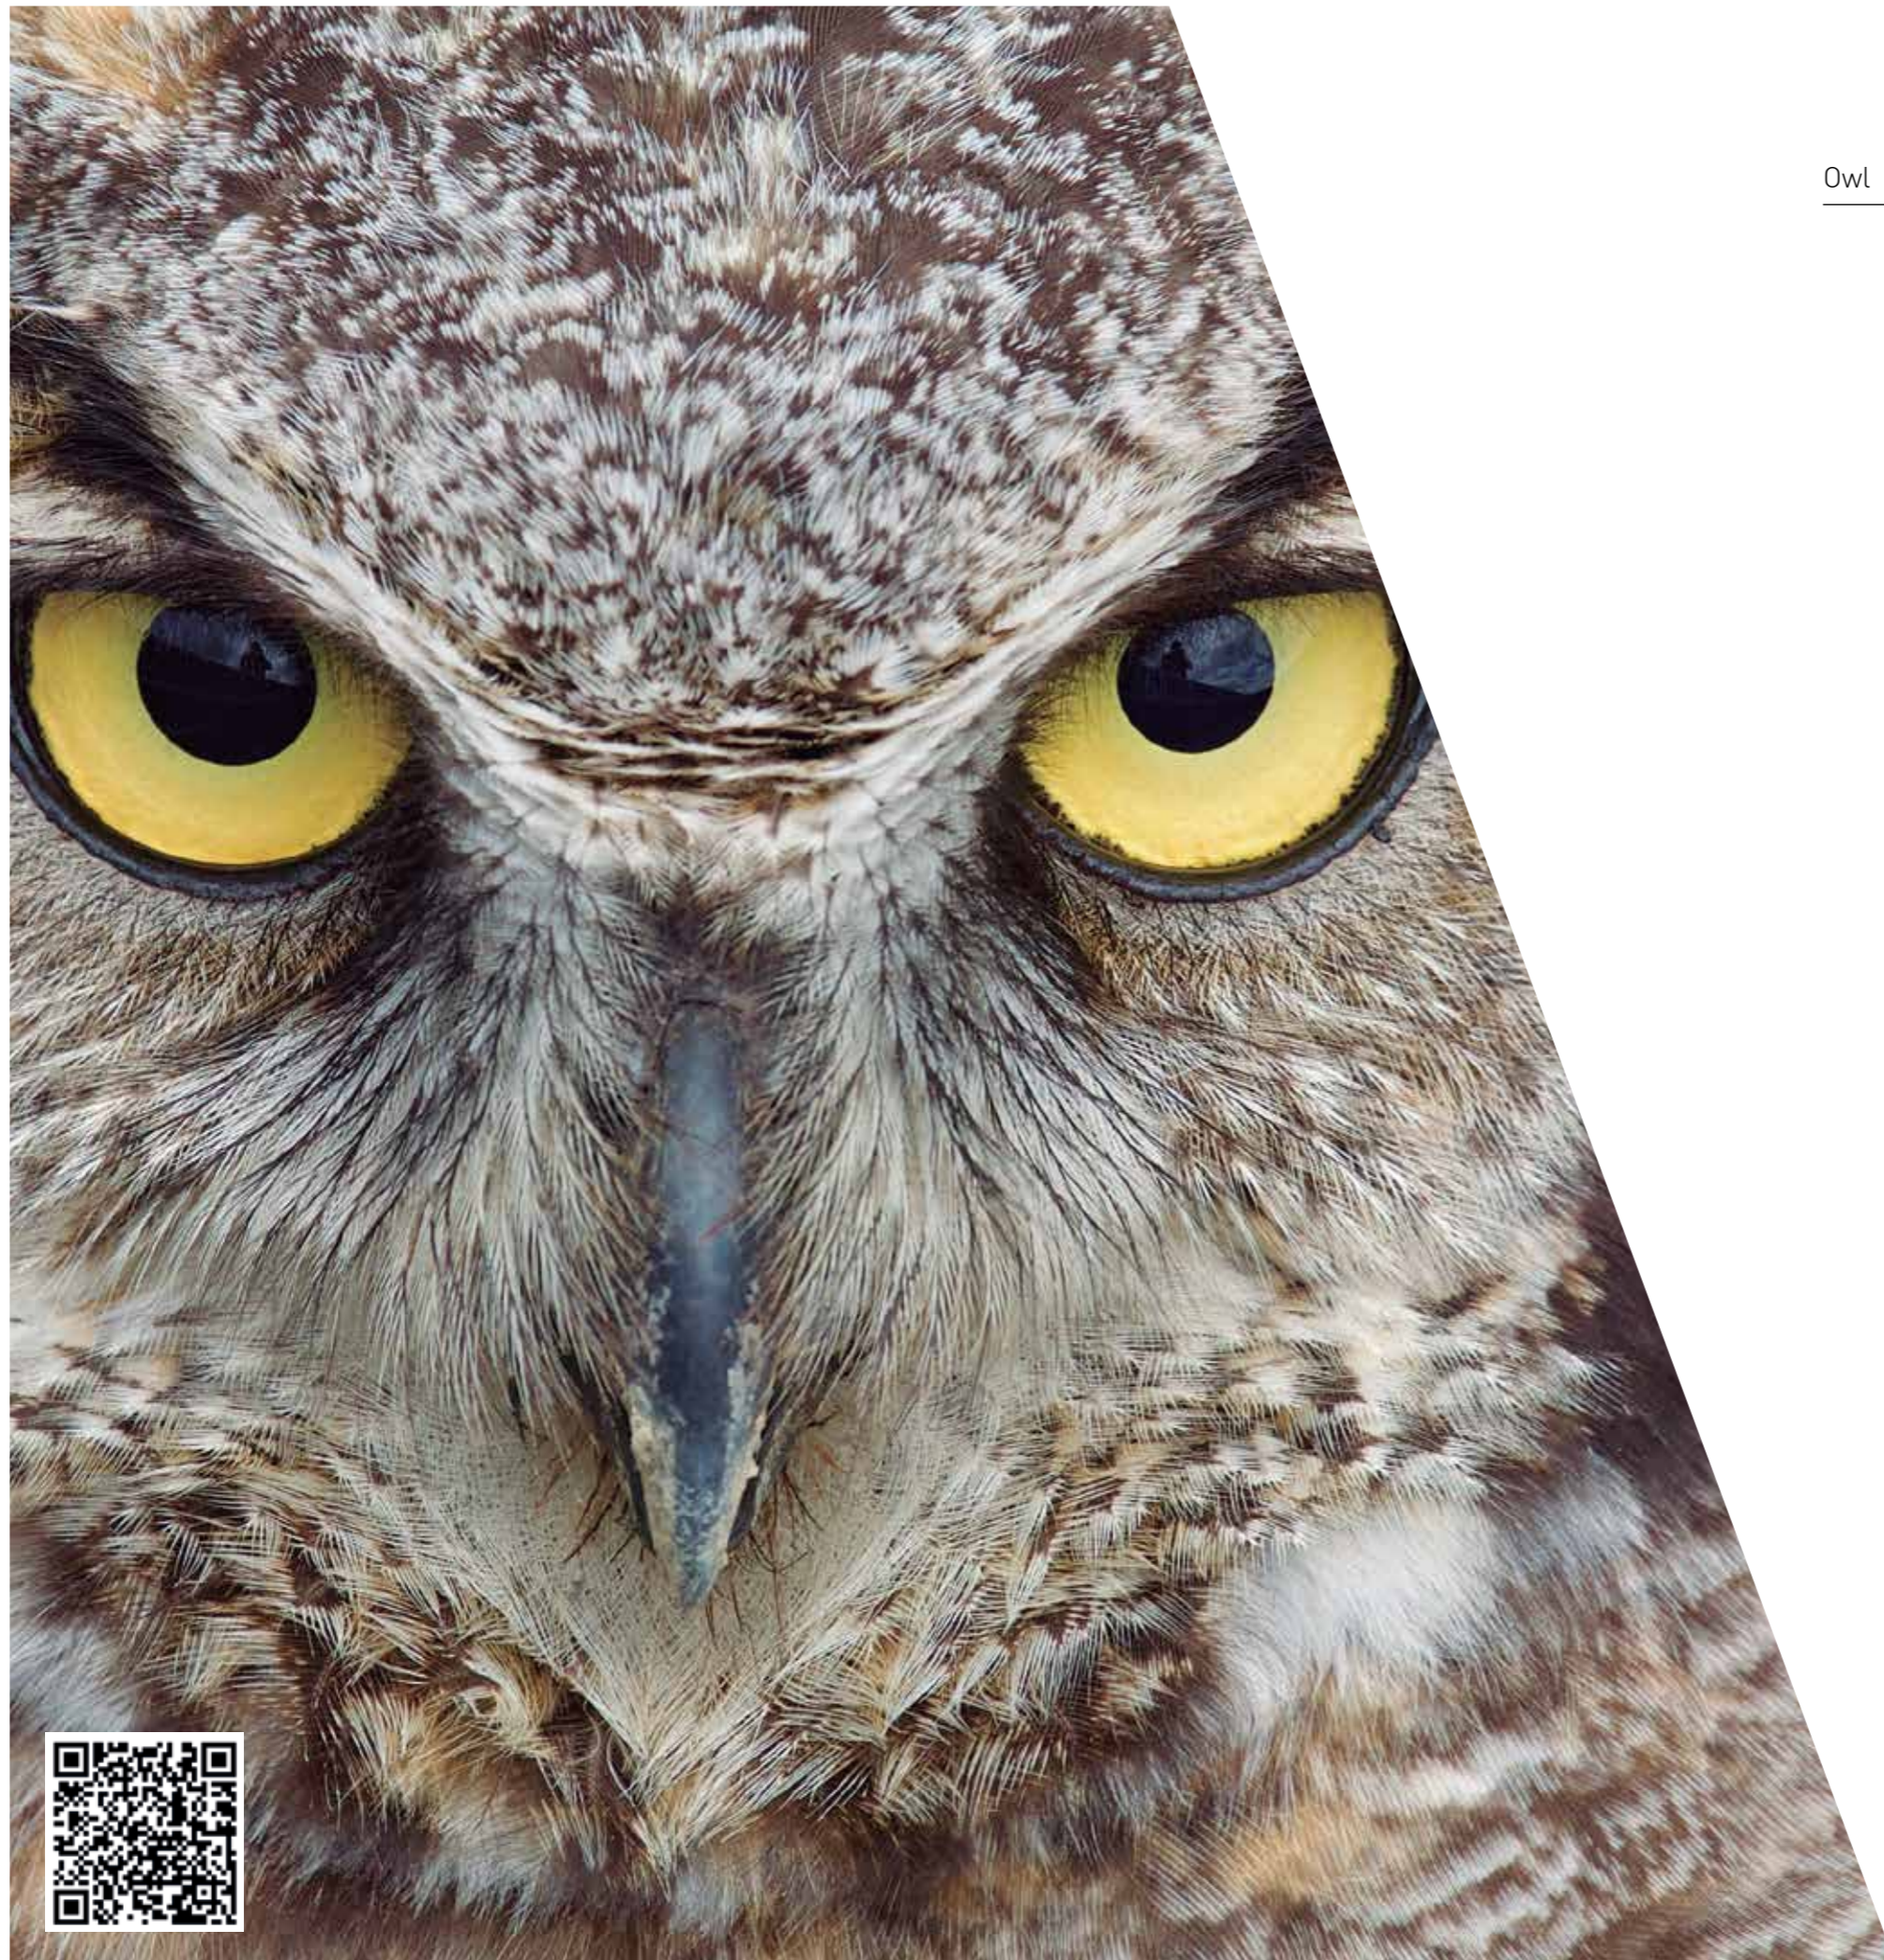

Owl



OWL R2L
10W - P139



OWL R4L
14W - P141





OWL R5L
20W - P141

Puntos que vislumbran en la oscuridad hasta el más mínimo detalle, así son los ojos de un buho. OWL con sus pequeñas y elegantes luminarias trae luz a cualquier sitio en tus estancias.


Points that glimpse in the dark to the smallest detail, such are the eyes of an owl. OWL with its small and elegant luminaires brings light to any room in your rooms.



OWL
DOTS 

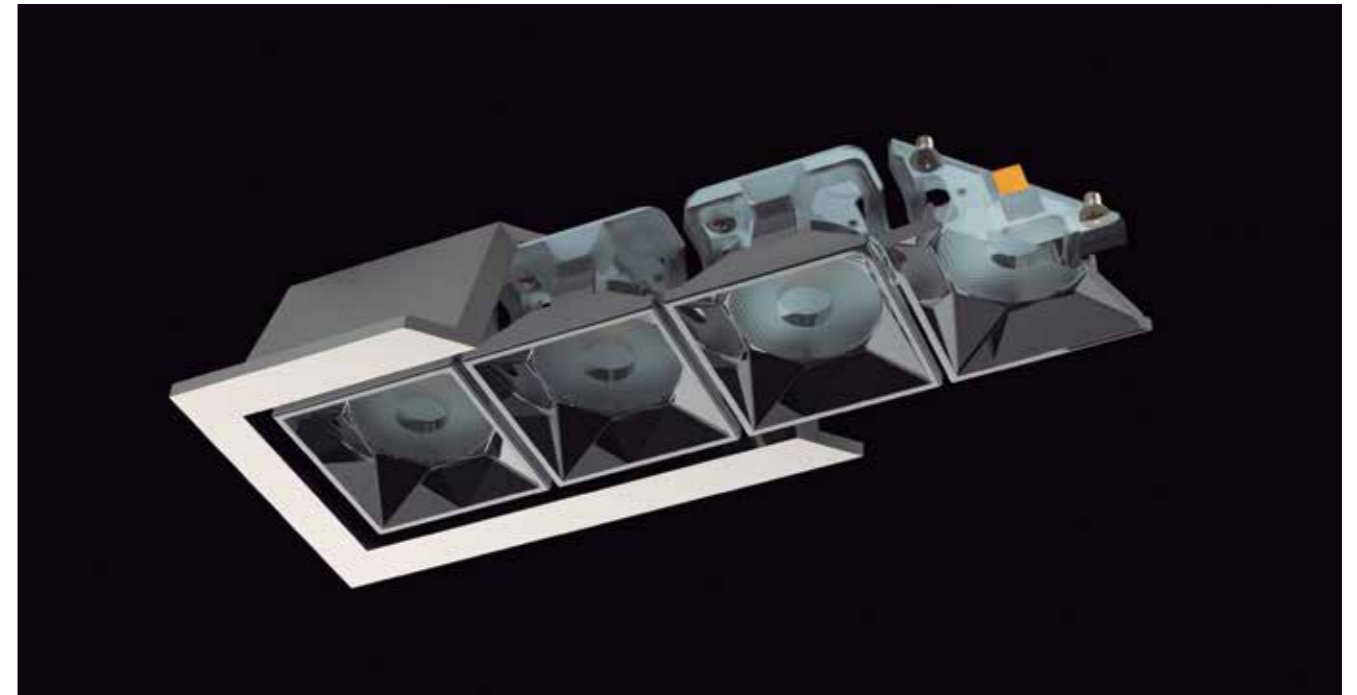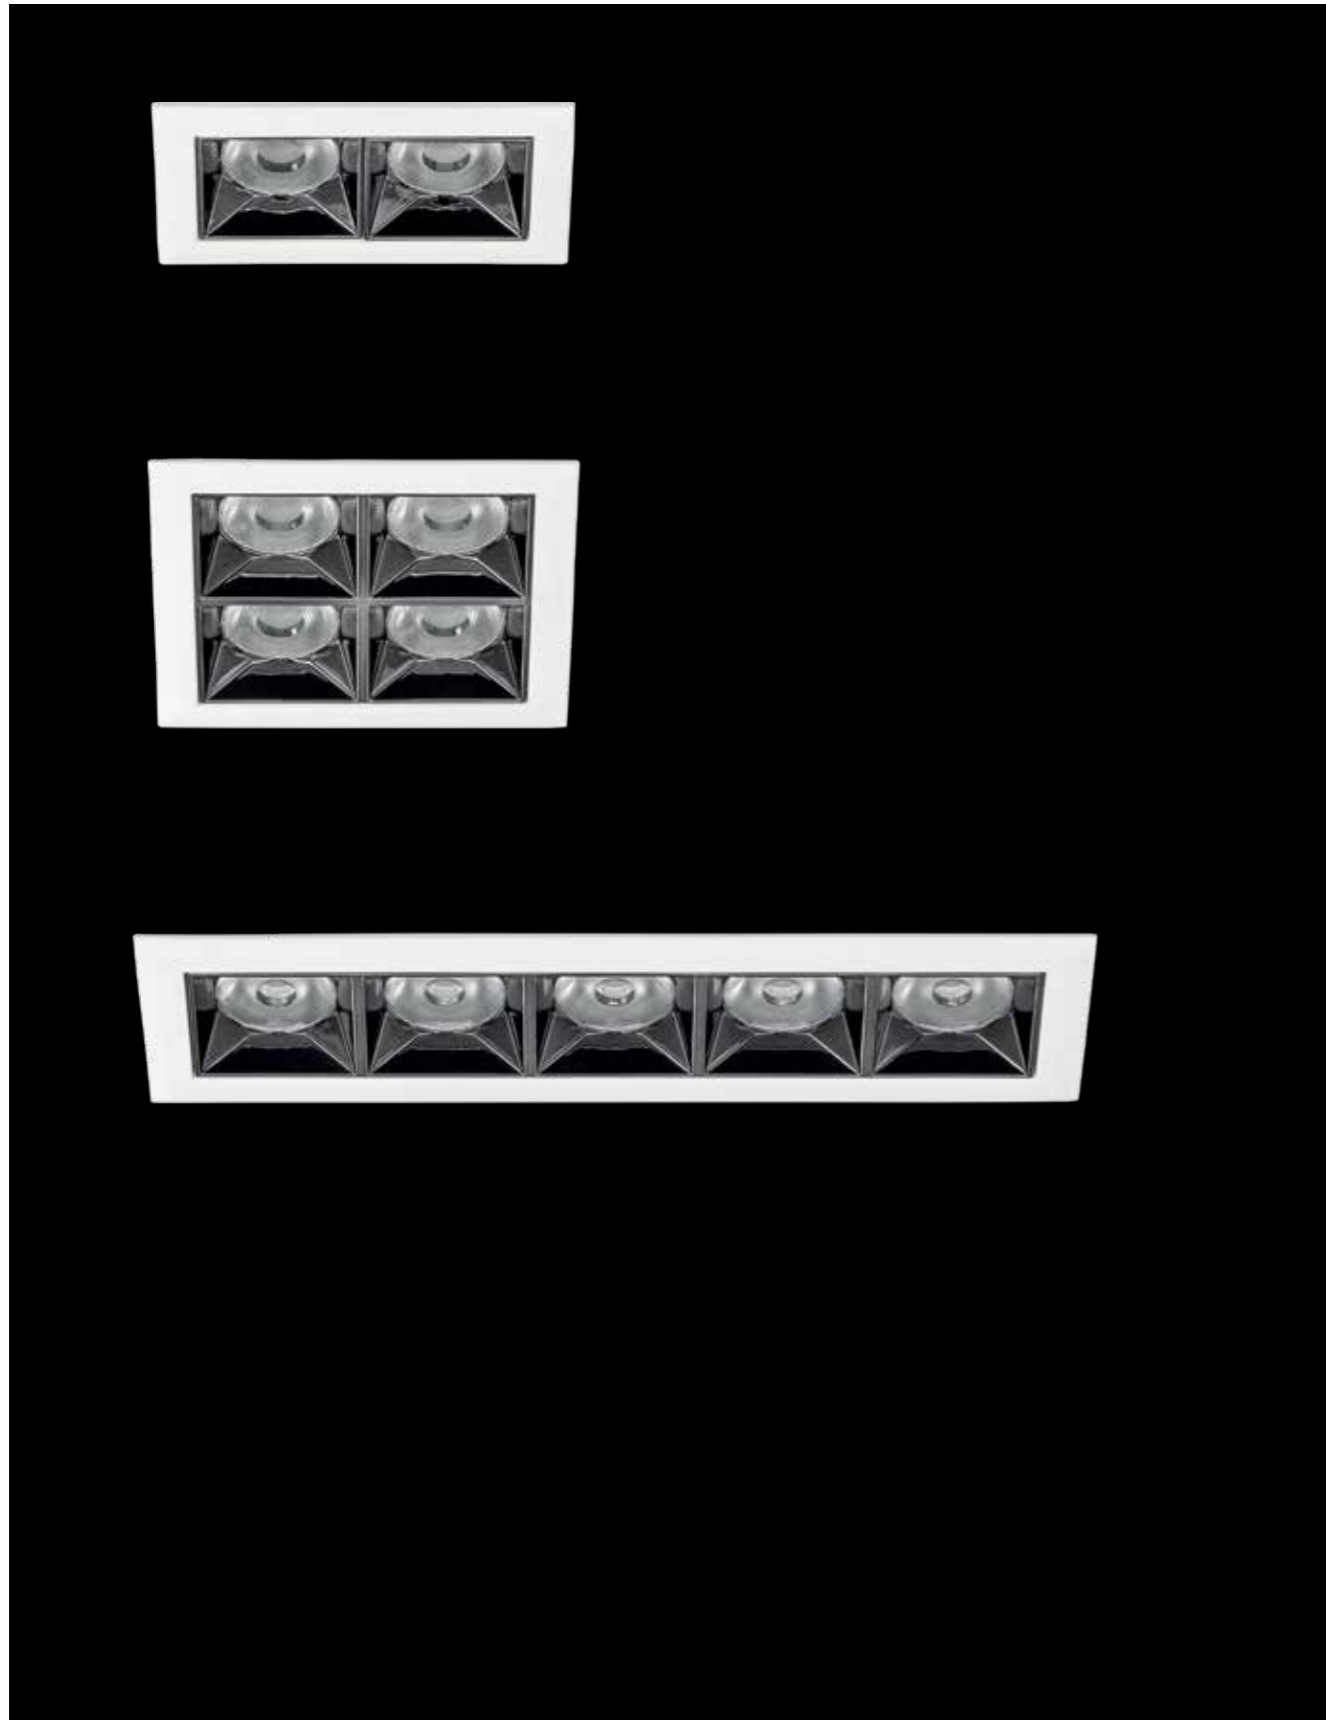


The OWL collection has different sizes and opening degrees, but the same linear design.
Applications: residential, hospitality.

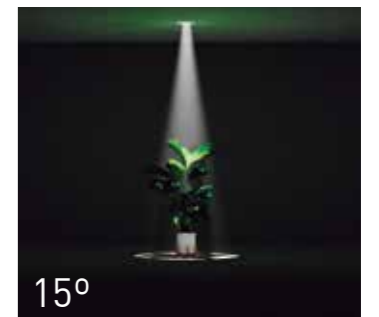

15°



24°

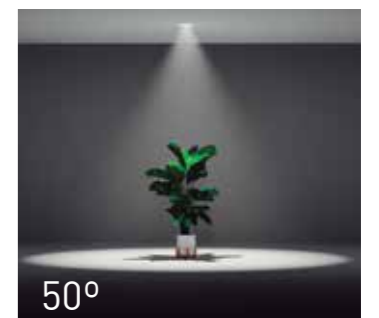


50°



OWL R2L


7ID512 10 - 2 1 W 3 - 9018
1 2 3 4 5 6 7

1 - Model	2 - Power	3 - Power Supply	4 - Warranty	5 - Degree	6 - K	7 - Color
7ID512	10W	<ul style="list-style-type: none"> 2- ON/OFF 220-240V PF>0,9 3- 1-10V 200-240V PF>0,95 5- Trailing Edge 220-240V PF>0,95 D- DALI / PUSH 200-240V PF>0,95 SMART CONTROL (See page. 324) 	<ul style="list-style-type: none"> 1- 5 Years Warranty JISO driver Incl. (Option Driver 2 - 5) 2- 5 Years Warranty Other driver Incl. (Option Driver 3 - D) 	<ul style="list-style-type: none"> A - 15° I - 24° W - 50° 	<ul style="list-style-type: none"> 3 - 3000K 880 lm system 1280 lm source (50°) 4 - 4000K 924 lm system 1350 lm source (50°) 	<ul style="list-style-type: none"> 9018- Tec. White- Graphite

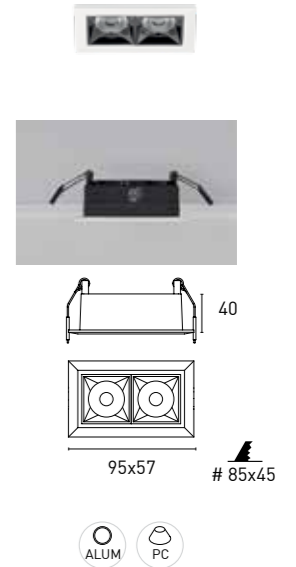

Accessories not included

Emergency kit (page 322-323)



The above information is basic. For updated and more accurate information, please consult Technical Data Sheet on www.jisoiluminacion.com




OWL R4L



7ID512 12 - 2 1 W 3 - 9018
1 2 3 4 5 6 7

1 - Model	2 - Power	3 - Power Supply	4 - Warranty	5 - Degree	6 - K	7 - Color
7ID512	14W	<ul style="list-style-type: none"> 2- ON/OFF 220-240V PF>0,9 3- 1-10V 200-240V PF>0,95 5- Trailing Edge 220-240V PF>0,9 D- DALI / PUSH 200-240V PF>0,95 SMART CONTROL [See page. 324] 	<ul style="list-style-type: none"> 1- 5 Years Warranty JISO driver Incl. [Option Driver 2 - 5] 2- 5 Years Warranty Other driver Incl. [Option Driver 3 - D] 	<ul style="list-style-type: none"> A - 15° I - 24° W - 50° 	<ul style="list-style-type: none"> 3 - 3000K 1080 lm system 1536 lm source [50°] 4 - 4000K 1134 lm system 1620 lm source [50°] 	<ul style="list-style-type: none"> 9018- Tec. White- Graphite

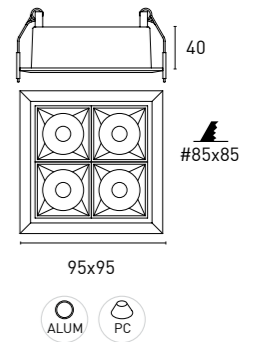


OWL R5L



7ID512 20 - 2 1 W 3 - 9018
1 2 3 4 5 6 7

1 - Model	2 - Power	3 - Power Supply	4 - Warranty	5 - Degree	6 - K	7 - Color
7ID512	20W	<ul style="list-style-type: none"> 2- ON/OFF 220-240V PF>0,95 4- DALI/PUSH/1-10V 200-240V PF>0,95 5- Trailing Edge 220-240V PF>0,9 SMART CONTROL [See page. 324] 	<ul style="list-style-type: none"> 1- 5 Years Warranty JISO driver Incl. [Option Driver 2 - 5] 2- 5 Years Warranty Other driver Incl. [Option Driver 4] 	<ul style="list-style-type: none"> A - 15° I - 24° W - 50° 	<ul style="list-style-type: none"> 3 - 3000K 1840 lm system 2560 lm source [50°] 4 - 4000K 1932 lm system 2700 lm source [50°] 	<ul style="list-style-type: none"> 9018- Tec. White- Graphite

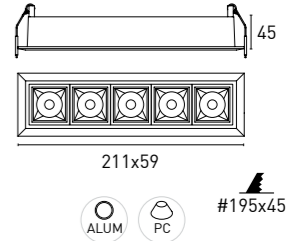

Accessories not included

Emergency kit [page 322-323]

- 2DCLEDK5
- 2DCLEDK29



The above information is basic. For updated and more accurate information, please consult Technical Data Sheet on www.jisoiluminacion.com

